

LED RGB KIT INSTALLATION INSTRUCTIONS




#1 - START BY REMOVING ALL 4 SCREWS ON GRILL

REV-8-B

REV-8-RGB-KIT



LED RGB KIT INSTALLATION INSTRUCTIONS

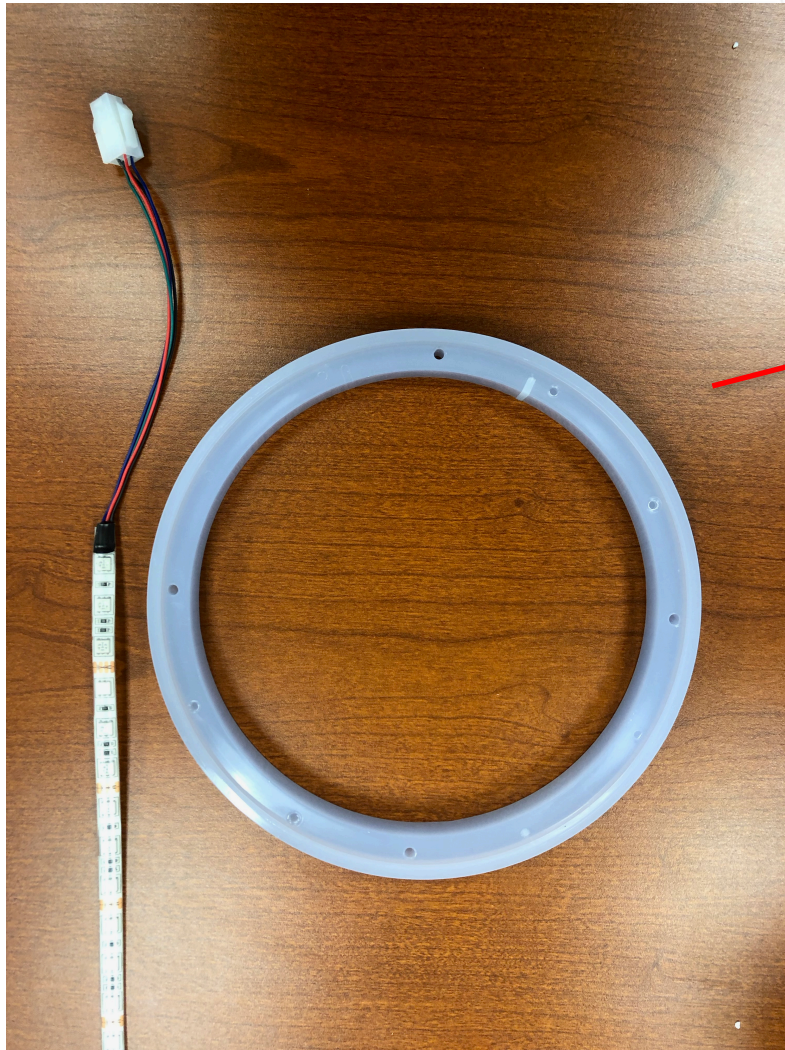

#2 – UNPACKAGE LED RING AND STRIP



LED RGB KIT INSTALLATION INSTRUCTIONS



#3 – REMOVE GRILL AND NOTE NOTCH PLACEMENT FOR LED STRIP




**#4 – REMOVE DRIVER FROM HOUSING,
BE CAREFUL NOT TO DAMAGE HORN.
DISCONNECT ALL CONNECTIONS AND
REMOVE FROM HOUSING.**

LED RGB KIT INSTALLATION INSTRUCTIONS



**#5 – REMOVE RUBBER STOPPER
FROM HOUSING FOR LED WIRES.**



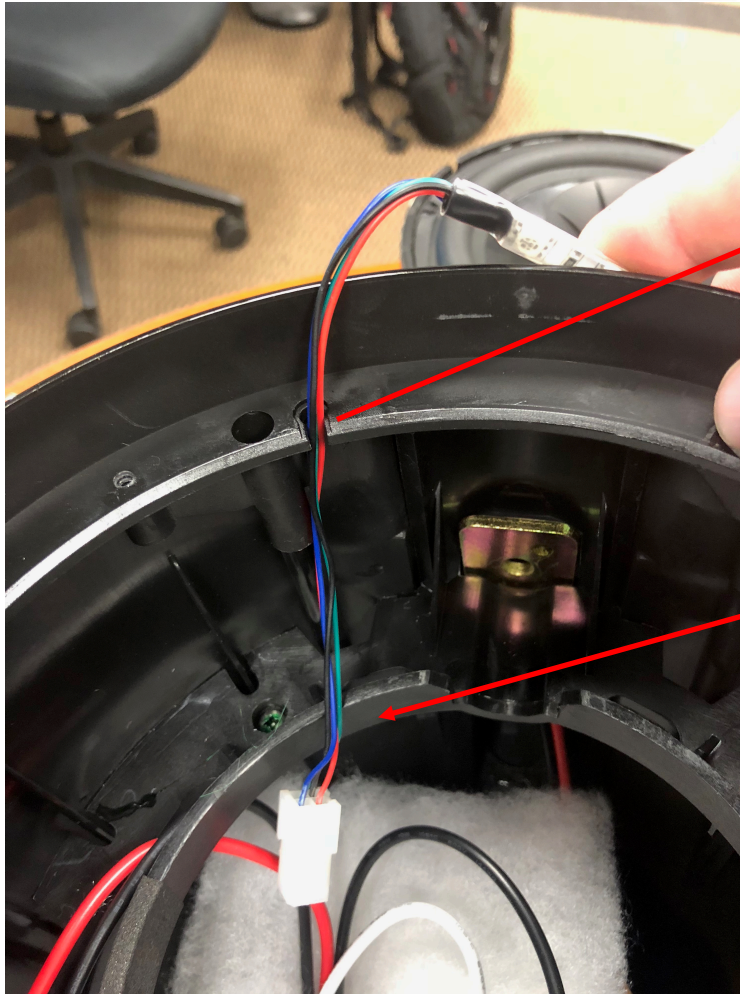

**#6 – ROUTE RGB WIRES THROUGH
OPENING.**

**MAKE SURE THE RGB WIRES ARE ROUTED
BEHIND THE PLASTIC RIM WHERE
MAGNET WILL REST AGAINST AND
CONNECT TO TOWER RGB WIRING.**




#7 - REINSTALL THE DRIVER INTO THE HOUSING AND RECONNECT DRIVER CONNECTIONS. NOTE RED FOR POSSITIVE BLK FOR NEGATIVE ON DRIVER. NOTE WHITE FOR POSSITIVE AND BLK FOR NEG ON HORN. MAKE SURE THE RGB STRIP IS RAN THROUGH THE APPROPRIATE HOLE IN THE HOUSING.

REFER BACK TO SLIDE #7 FOR PROPPER WIRE ROUTING.

LED RGB KIT INSTALLATION INSTRUCTIONS

#8 - REMOVE BACKING FROM LED STRIP

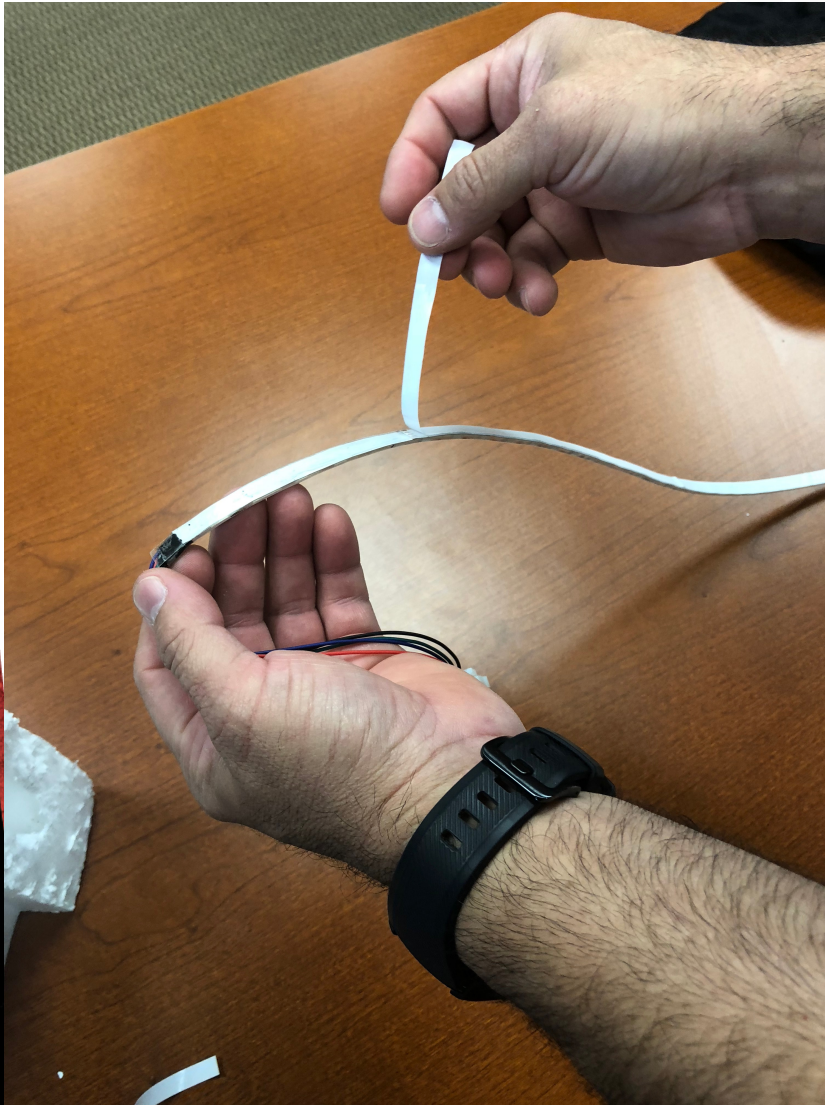

#9 - INSTALL LED STRIP ONTO HOUSING



LED RGB KIT INSTALLATION INSTRUCTIONS



LED STRIP INSTALLED, NOTE RGB WIRE ROUTING. MAKE SURE LED STRIP IS EVENLY PLACED AND IS AGAINST THE DRIVER.



**#10 - INSTALL ACRYLIC RING, NOTE
PLACEMENT OF NOTCH ON RING.**



LED RGB KIT INSTALLATION INSTRUCTIONS



**RE-INSTALL GRILL USING THE NEW
LONGER PROVIDED SCREWS IN THE RGB
LED RING KIT.**

