G3-C UNIVERSAL GRIPS

HIGH PERFORMANCE, HEAVY EQUIPMENT AND MATERIAL HANDLING GRIPS

G3-C UNIVERSAL GRIP

Operator presence, trigger switches, side keypads, faceplate keypads and z-axis rotation are the exciting features of OTTO's ergonomically designed and customizable G3-C Universal Grip. Its high switch content capability increases the level of functionality, benefiting anyone who requires versatility in a grip.

The operator presence uses a sensor to detect the presence of the operator's hand on the grip. The new trigger switch selections for the back of the grip include single trigger, dual momentary trigger and dual maintained trigger. Keypads are available on both the faceplate, with up to 8 switches, and on either side of the grip as a side keypad, with up to 10 switches on each side (G3-CK). Backlighting is also an option. The z-axis feature allows for a +/-25° horizontal rotation of the grip.

With numerous faceplate selections, the G3-C can be customized from applications requiring basic control functions to those requiring high switch content. The G3-C can be panel mounted as a fixed control grip, panel mounted with z-axis, or it can be mounted on an OTTO JH, JHL and JHM joystick with or without z-axis.

The G3-C is designed for use with OTTO's pushbuttons, rockers, toggles and Hall effect switches, and can handle many types of high-performance industrial vehicle and machinery applications.

Features:

- The grip can be used with either the left or right hand
- Numerous standard faceplate designs incorporating up to 8 control switches (G3-C) or an 8-button keypad (G3-CK)
- 10-button side keypad option (G3-CK)
- Operator presence option
- Z-axis option with +/- 25 rotation
- Switch selections for the back of the grip handle include pushbutton, thumbwheel and trigger switches
- Various mounting & termination styles available
- Includes mounting adapter with boot ring

Benefits:

- Modular design provides high level of customization and reduces the need for tooling charges
- Compatible with the OTTO JH, JHL and JHM series Hall effect Joysticks
- Accommodates a full line of OTTO pushbutton, rocker, toggle, and Hall effect switches



G3-C with CC Faceplate



G3-CK with 8-Button Faceplate Keypad



G3-CK with Backlighted 8-Button Faceplate and a 10-Button Side Keypad



G3-C with Custom **Faceplate Configuration**



G3-C with Dual **Direction Trigger** on Back



G3-C with Pushbutton on Side and Back

G3-C & G3-CK UNIVERSAL GRIPS

Standard Characteristics/Ra	atings:			
ELECTRICAL RATINGS:				
K1 Switches				
Electrical Rating @ 28 VDC	16 AMP R	esistive L	oad; 7 AM	P Inductive Load
Electrical Life	25,000 Cyc	les at Fu	II Load	
Keypads				
Circuit Configuration	SPST N.O.			
Voltage	1-32 VDC			
Current	10-100mA	Resistiv	е	
P9 Switches, Single and Dual Trig	jger			
Electrical Rating @ 28 VDC				10mA Resistive Load @ 5VDC
Electrical Life	25,000 Cyc	les at Fu	II Load	1,000,000 Cycle:
HTWM Switches				
Rated at Vcc = 5V @ 25°C;				
Load = $1ma (4-7K\Omega)$	Units	Min	Тур	Max
Supply Voltage	VDC	4.50	5.00	5.50
Output Voltage - Return to Center	VDC @ 5V Vcc	15	N/A	+.15
Tolerance at Center Output Voltage - Return to End	VDC	25	N/A	+.25
Tolerance at Rest	@ 5V Vcc	23	IN/A	+.23
Output Voltage	VDC	25	N/A	+.25
Tolerance Full Travel	@ 5V Vcc			
Supply Current B=0, Vcc=5V, lout=0	mA	N/A	N/A	10
HTWS Switches				
Rated at Vcc = 5V @ 25°C;				
Load = $1ma (4-7K\Omega)$	Units	Min	Тур	Max
Supply Voltage	VDC	4.50	5.00	5.50
0	VDO	0.5	B1/A	0.5
Output Voltage Tolerance at Center	VDC @ 5V Vcc	25	N/A	+.25
Tolerance at Center	VDC @ 5V Vcc VDC	25 25	N/A N/A	+.25
	@ 5V Vcc		-	-
Tolerance at Center Output Voltage	@ 5V Vcc VDC		-	-
Tolerance at Center Output Voltage Tolerance Full Travel	@ 5V Vcc VDC @ 5V Vcc	25	N/A	+.25
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current	@ 5V Vcc VDC @ 5V Vcc	25	N/A	+.25
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0	@ 5V Vcc VDC @ 5V Vcc	25	N/A	+.25
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 HTLT4 Switches	@ 5V Vcc VDC @ 5V Vcc	25	N/A	+.25
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 HTLT4 Switches Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ) Supply Voltage	@ 5V Vcc VDC @ 5V Vcc mA Units VDC	25 N/A Min 4.50	N/A N/A Typ 5.00	+.25
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 HTLT4 Switches Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ) Supply Voltage Output Voltage	@ 5V Vcc VDC @ 5V Vcc mA Units VDC VDC	25 N/A Min	N/A N/A	+.25 20 Max
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 HTLT4 Switches Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ) Supply Voltage Output Voltage Tolerance at Center	@ 5V Vcc VDC @ 5V Vcc mA Units VDC VDC @ 5V Vcc	25 N/A Min 4.50 25	N/A N/A Typ 5.00 N/A	+.25 20 Max 5.50 +.25
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 HTLT4 Switches Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ) Supply Voltage Output Voltage	@ 5V Vcc VDC @ 5V Vcc mA Units VDC VDC	25 N/A Min 4.50	N/A N/A Typ 5.00	+.25 20 Max 5.50
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 HTLT4 Switches Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ) Supply Voltage Output Voltage Tolerance at Center Output Voltage Tolerance Full Travel Supply Current	@ 5V Vcc VDC @ 5V Vcc mA Units VDC VDC @ 5V Vcc VDC	25 N/A Min 4.50 25	N/A N/A Typ 5.00 N/A	+.25 20 Max 5.50 +.25
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 HTLT4 Switches Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ) Supply Voltage Output Voltage Tolerance at Center Output Voltage Tolerance Full Travel	@ 5V Vcc VDC @ 5V Vcc mA Units VDC VDC @ 5V Vcc VDC @ 5V Vcc	25 N/A Min 4.50 25	N/A N/A Typ 5.00 N/A N/A	+.25 20 Max 5.50 +.25 +.25
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 HTLT4 Switches Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ) Supply Voltage Output Voltage Tolerance at Center Output Voltage Tolerance Full Travel Supply Current	@ 5V Vcc VDC @ 5V Vcc mA Units VDC VDC @ 5V Vcc VDC @ 5V Vcc	25 N/A Min 4.50 25	N/A N/A Typ 5.00 N/A N/A	+.25 20 Max 5.50 +.25 +.25
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 HTLT4 Switches Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ) Supply Voltage Output Voltage Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0	@ 5V Vcc VDC @ 5V Vcc mA Units VDC VDC @ 5V Vcc VDC @ 5V Vcc	25 N/A Min 4.50 25 25	N/A N/A Typ 5.00 N/A N/A	+.25 20 Max 5.50 +.25 +.25
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 HTLT4 Switches Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ) Supply Voltage Output Voltage Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 TC-5 Switches	@ 5V Vcc VDC @ 5V Vcc mA Units VDC VDC @ 5V Vcc VDC @ 5V Vcc TDC W 5V Vcc TDC W 5V Vcc TDC	25 N/A Min 4.50 25 25	N/A N/A Typ 5.00 N/A N/A	+.25 20 Max 5.50 +.25 +.25
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 HTLT4 Switches Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ) Supply Voltage Output Voltage Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 TC-5 Switches Electrical Rating @ 1–32 VDC	@ 5V Vcc VDC @ 5V Vcc mA Units VDC VDC @ 5V Vcc VDC @ 5V Vcc TDC WDC TDC WDC TDC TDC TDC TDC TDC TDC TDC TDC TDC T	25 N/A Min 4.50 25 25	N/A N/A Typ 5.00 N/A N/A	+.25 20 Max 5.50 +.25 +.25
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 HTLT4 Switches Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ) Supply Voltage Output Voltage Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 TC-5 Switches Electrical Rating @ 1–32 VDC Electrical Life	@ 5V Vcc VDC @ 5V Vcc mA Units VDC VDC @ 5V Vcc VDC @ 5V Vcc TDC WDC TDC WDC TDC TDC TDC TDC TDC TDC TDC TDC TDC T	25 N/A Min 4.50 25 25	N/A N/A Typ 5.00 N/A N/A	+.25 20 Max 5.50 +.25 +.25
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 HTLT4 Switches Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ) Supply Voltage Output Voltage Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 TC-5 Switches Electrical Rating @ 1–32 VDC Electrical Life Operator Presence	@ 5V Vcc VDC @ 5V Vcc mA Units VDC VDC @ 5V Vcc VDC @ 5V Vcc TDC WDC TDC WDC TDC TDC TDC TDC TDC TDC TDC TDC TDC T	25 N/A Min 4.50 25 25	N/A N/A Typ 5.00 N/A N/A	+.25 20 Max 5.50 +.25 +.25
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 HTLT4 Switches Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ) Supply Voltage Output Voltage Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 TC-5 Switches Electrical Rating @ 1–32 VDC Electrical Life Operator Presence Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ) Supply Voltage	Work of the state	25 N/A Min 4.502525 N/A Cycles Min 3.00	N/A N/A Typ 5.00 N/A N/A 10	+.25 20 Max 5.50 +.25 +.25
Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 HTLT4 Switches Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ) Supply Voltage Output Voltage Tolerance at Center Output Voltage Tolerance Full Travel Supply Current B=0, Vcc=5V, lout=0 TC-5 Switches Electrical Rating @ 1–32 VDC Electrical Life Operator Presence Rated at Vcc = 5V @ 25°C; Load = 1ma (4-7KΩ)	Work of the state	25 N/A Min 4.502525 N/A	N/A N/A Typ 5.00 N/A N/A 10	+.25 20 Max 5.50 +.25 +.25

Standard Characteristics/	natiliys (Ct	Jiidiiaca,				
MECHANICAL RATINGS						
(1 Switches						
Mechanical Life	100,000 Cycles					
Ceypads						
Mechanical Life	3,000,000 Cycles					
9 Switches, Single and Dual T	rigger					
Mechanical Life	1,000,000	Cycles				
ITWM Switches						
Mechanical Life	3,000,000 Cycles (Return to Center)					
Full Forward to Full Back)	1,000,000 Cycles (Return to End)					
ITWS Switches						
Лесhanical Life Full Forward to Full Back)	3,000,000	Cycles				
ITLT4 Switches						
Mechanical Life	3,000,000	Cycles				
C-5 Switches						
Nechanical Life	3,000,000	3,000,000 Cycles				
NVIRONMENTAL:						
Operating Temperature:	° C	-40*	Typ 20	85		
(1 Switches						
Switch Seal Integrity	Watertig	ht per IP68	S and IP69k	(
(eypads						
Switch Seal Integrity	Watertig	ht per IP68	S and IP69k	(
9 Switches, Single and Dual T		, · · · · ·				
Switch Seal Integrity		ht per IP68	S and IP69k	(
ITWM Switches		,				
Electronics Seal Integrity	Watertin	ht per IP68	S and IP69k	(
ITWS Switches						
ITWS Switches	-	ht per IP68	S and IP69k	(
ITWS Switches Electronics Seal Integrity ITLT4 Switches	-	ht per IP68	S and IP69k	(
Electronics Seal Integrity	Watertig					
electronics Seal Integrity	Watertig	ht per IP68 ht per IP68				
Ilectronics Seal Integrity ITLT4 Switches Electronics Seal Integrity C-5 Switches	Watertig Watertig	ht per IP68	S and IP69k	(
lectronics Seal Integrity ITLT4 Switches Electronics Seal Integrity	Watertig Watertig		S and IP69k	(
Ilectronics Seal Integrity ITLT4 Switches Electronics Seal Integrity IC-5 Switches Electronics Seal Integrity	Watertig Watertig	ht per IP68	S and IP69k	(
Ilectronics Seal Integrity ITLT4 Switches Electronics Seal Integrity IC-5 Switches Electronics Seal Integrity	Watertig Watertig Watertig	ht per IP68	S and IP69k	(
Ilectronics Seal Integrity ITLT4 Switches Electronics Seal Integrity IC-5 Switches Electronics Seal Integrity Integrity Integrity Integrity Integrity	Watertig Watertig Watertig	ht per IP68	S and IP69k S and IP69k	(
Ilectronics Seal Integrity ITLT4 Switches Electronics Seal Integrity IC-5 Switches Electronics Seal Integrity Integr	Watertig Watertig Watertig Unsealed	ht per IP68	S and IP69k S and IP69k es Reinforc	< ed, Black		
Ilectronics Seal Integrity ITLT4 Switches Ilectronics Seal Integrity IC-5 Switches Ilectronics Seal Integrity Ilectronics Seal Integrity	Watertig Watertig Unsealed Thermog	ht per IP68:	S and IP69k S and IP69k ss Reinforces Reinforces	< ed, Black		
Ilectronics Seal Integrity ITLT4 Switches Ilectronics Seal Integrity IC-5 Switches Ilectronics Seal Integrity Integrity Integrity Integrity IMATERIALS: Ilandle Integrite Integrity Integrity Integrity Integrity Integrity	Watertig Watertig Watertig Unsealed Thermog Thermog Silicone	ht per IP68: ht per IP68: John Strict, Glassic, Glassic	S and IP69k S and IP69k ss Reinforces Reinforceack	< ed, Black		
Electronics Seal Integrity HTLT4 Switches Electronics Seal Integrity TC-5 Switches Electronics Seal Integrity Grip Geal Integrity MATERIALS: Landle Gaceplate Geypads	Watertig Watertig Watertig Unsealed Thermog Thermog Silicone	ht per IP68: ht per IP68: John Strict, Glassic, Glassic	S and IP69k S and IP69k ss Reinforces Reinforceack	ed, Black		
Electronics Seal Integrity HTLT4 Switches Electronics Seal Integrity CC-5 Switches Electronics Seal Integrity Grip Geal Integrity MATERIALS: Landle Gaceplate Keypads Keypads, Lighted	Watertig Watertig Unsealed Thermop Silicone	ht per IP68: ht per IP68: John Strict, Glassic, Glassic	S and IP69k S and IP69k ss Reinforces Reinforceack	ed, Black		


^{*} The min. temperature is -30°C when using a K1 switch.

WARNING; Do not use the operator presence as a safety or emergency stop device or in any application where failure of the product could result in personal injury. Failure to comply with these instructions could result in death or serious injury. OTTO Engineering Inc. makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does OTTO Engineering Inc. assume any liability whatsoever arising out of the application or use of any product. The product sold hereunder by OTTO has been subject to limited testing and should not be used in conjunction with detection of the presence of an operator on or with any equipment that is in any way safety related. OTTO does not accept any liability for incidental, consequential damages, personal injury or loss of life for any claims against the use of this product.

G3-C UNIVERSAL GRIPS

HIGH PERFORMANCE, HEAVY EQUIPMENT AND MATERIAL HANDLING GRIPS

G3-C UNIVERSAL GRIP PART NUMBER CODE

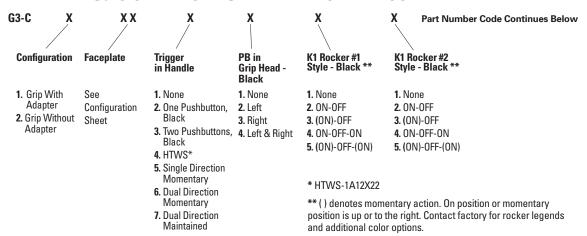



G3-C PART NUMBER CODE CONTINUED

	X X	X	X	X		X X	X	X	
HTWM #1***	HTWM #2***	P9 Button #1 Color	P9 Button #2 Color	P9 Button #3 Color	P9 Button #4 Color	P9 Button #5 Color	P9 Button #6 Color	P9 Button #7 Color	P9 Button #8 Color
1. None	1. None	N. None	N. None	N. None	N. None	N. None	N. None	N. None	N. None
2. Return to Center ¹	2. Return to Center ¹	1. Red	1 . Red	1. Red					
3. Return to End ²	3. Return to End ²	2. Black							
		3. Orange							
		4. Yellow							
		5. Green							
		6. Blue							
		7. Violet							
1 = HTWM-1J12X	22****	8. Gray	8. Gray	8. Gray	8. Gray	8. Gray	8. Gray	8. Gray	8. Gray
2 = HTWME-1A12		9. White	9. White	9. White	9. White	9. White	9. White	9. White	9. White

^{***} Positive travel is up or to the right. Contact factory for additional options.


G3-C UNIVERSAL GRIP OUTPUT

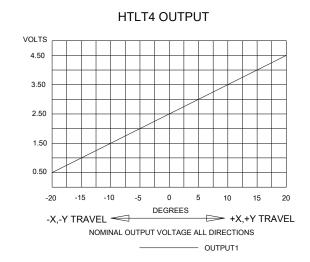


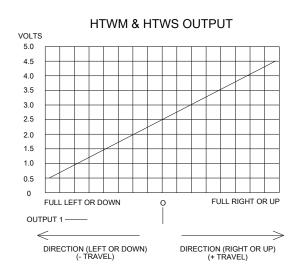


^{****} Contact factory for additional options.


G3-C UNIVERSAL GRIP DRAWINGS

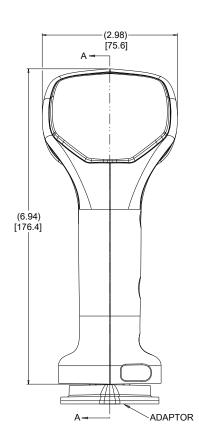


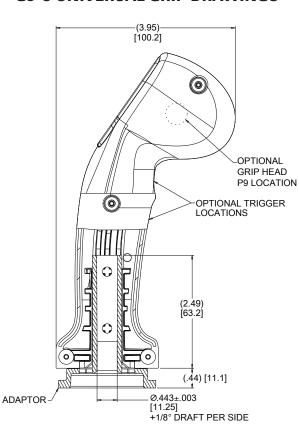


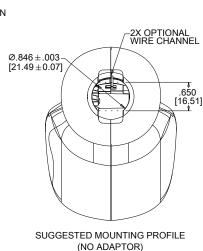



G3-C UNIVERSAL GRIP FACEPLATES




































- 1. All pushbuttons are normally open (NO).
- 2. Faceplates and switches are not actual size. Switches are not proportional to the faceplates. Drawings are for configuration reference only.

G3-C UNIVERSAL TRIGGER CONFIGURATIONS


CONFIGURATION #2

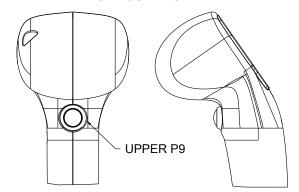


CONFIGURATION #3

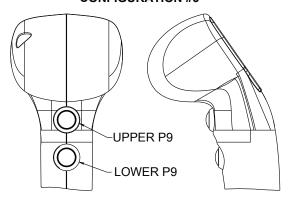


CONFIGURATION #4

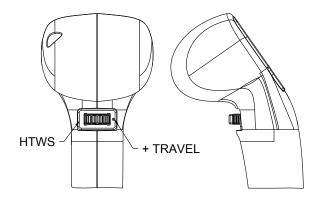


CONFIGURATION #5

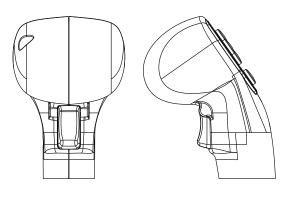

CONFIGURATION #6,7

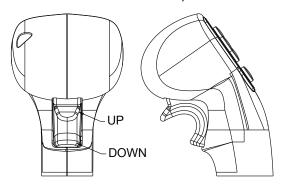

G3-C UNIVERSAL GRIP SCHEMATICS

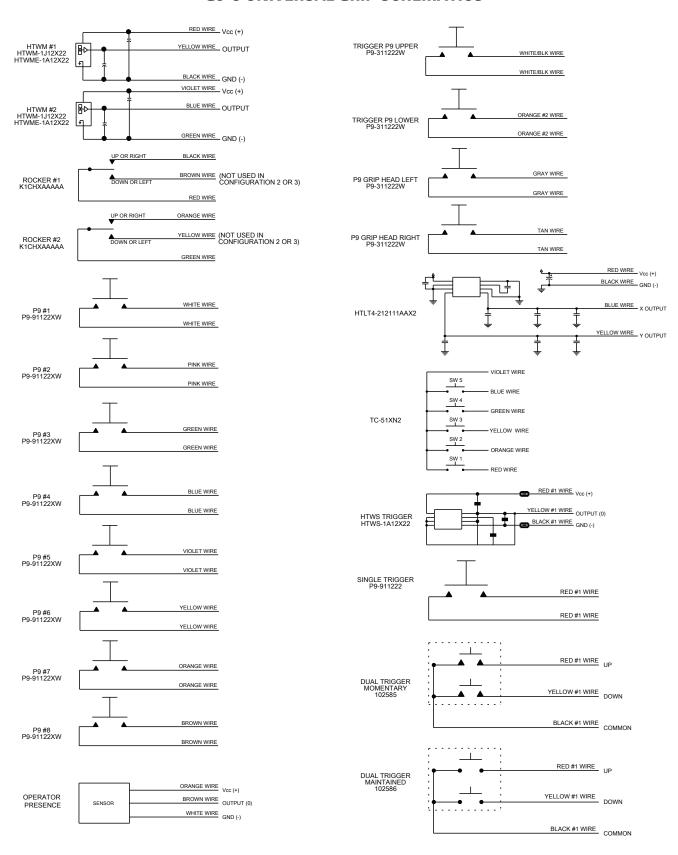

G3-CK UNIVERSAL GRIPS WITH KEYPADS


HIGH PERFORMANCE, HEAVY EQUIPMENT AND MATERIAL HANDLING GRIPS

G3-CK UNIVERSAL GRIP PART NUMBER CODE

G3-CK	X	X X	X /	X /	X	X
Adaptor	Center Keypad Configuration	Side Keypad Configuration	/ Back Lighting*	Trigger Option	P9 In Head (Black)	Operator Presence**
 None Standard 	4. 4 Buttons 6. 6 Buttons 8. 8 Buttons	1. None L. Left Hand R. Right Hand	N. None L. Lighted	1. None 2. One Pushbutton – Black 3. One Pushbutton – Red 4. Single 5. Dual Momentary 6. Dual Maintained 7. Two Pushbuttons – Black 8. Two Pushbuttons – Red 9. HTWS	1. None 2. Left Hand 3. Right Hand 4. Both	1. None 2. Handle


^{*} Backlighting applies to both the Keypad and Side Keypad

G3-CK UNIVERSAL GRIP DRAWINGS

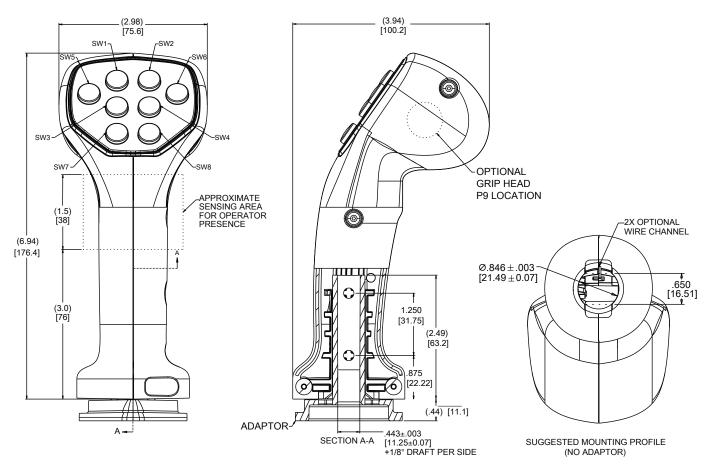


^{**} Operator Presence is not available with Trigger Option 5 or 6.

G3-CK UNIVERSAL KEYPAD CONFIGURATIONS

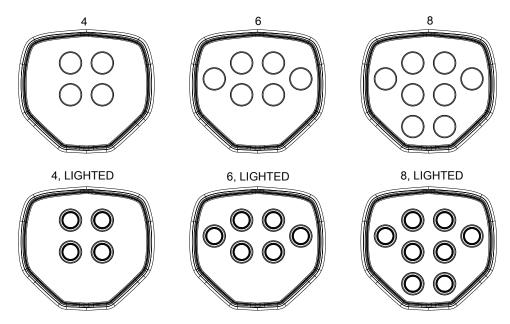

CENTER KEYPAD CONFIGURATIONS

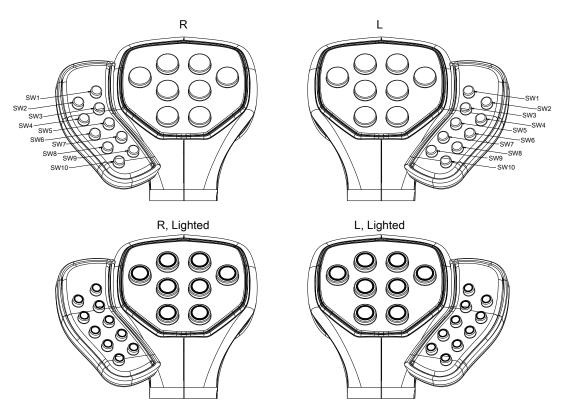


SIDE KEYPAD CONFIGURATIONS

G3-CK UNIVERSAL GRIPS WITH KEYPADS


HIGH PERFORMANCE, HEAVY EQUIPMENT AND MATERIAL HANDLING GRIPS

G3-CK UNIVERSAL TRIGGER CONFIGURATIONS


CONFIGURATION #1

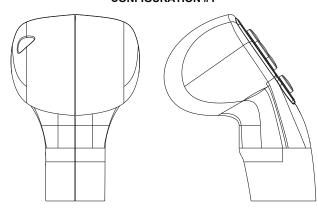


CONFIGURATION #2, 3

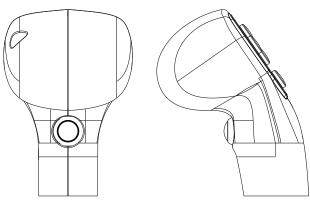


CONFIGURATION #4

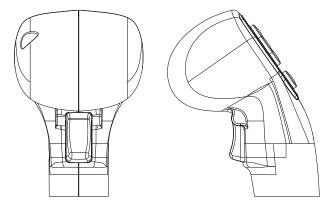


CONFIGURATION #5, 6

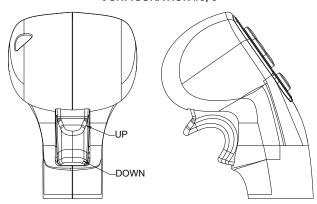

CONFIGURATION #7, 8

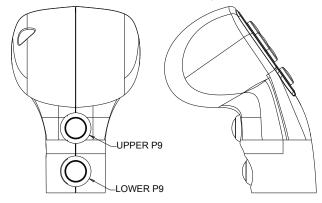

CONFIGURATION #9

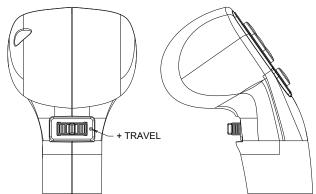

G3-CK UNIVERSAL SCHEMATICS

