


WET SOUNDS INC.
www.wetsounds.com
877-938-7757

10621 S Sam Houston PKWY W Suite 100
Houston, TX 77071-3140

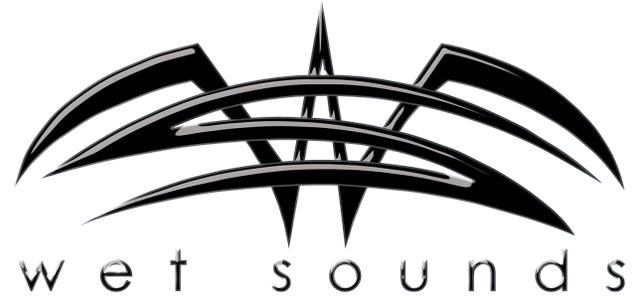

Revision date: July 2015

WET SOUNDS
BLUETOOTH VOLUME CONTROL
WW-BTVC-V2



The WW-BT-VC v2 is an easy to operate single control knob Bluetooth Volume Controller.

One simple knob controls all Bluetooth functions as well as the system volume!

HOW TO CONNECT TO THE WW-BT-VC v2 BLUETOOTH® CONTROLLER THROUGH BLUETOOTH PAIRING:


Step 1: Turn on WW-BT-VC v2 by turning on your ignition or dash switch. The red LED indicates that the WW-BT-VC v2 is ready to use.

Step 2: Press in and hold the Bluetooth knob until you see the blue LED indicator flashing. Once flashing, the WW-BT-VC v2 is ready to be paired with your Bluetooth enabled smart phone or portable device.

Step 3: From your phone's Bluetooth pairing menu find the WW-BT-VC v2 and connect to it.

(To unpair from the WW-BT-VC v2 simply double tap the controller knob.)
 Follow your phone's instruction guide for Bluetooth pairing. Make sure that Bluetooth is activated on your mobile phone.

OPERATING INSTRUCTIONS:

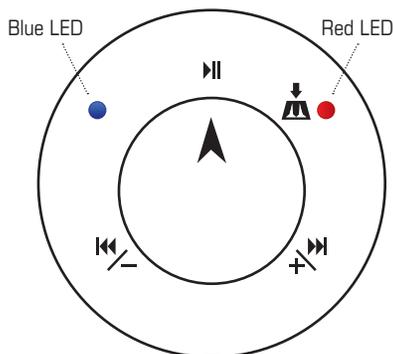

- Play music:** Start your media player or music streaming service
- Pause Music:** Tap the knob once to pause, tap a second time to resume play mode
- Skip one track forward:** Turn knob Clockwise for approx. 1 second
- Skip one track backward:** Turn knob Counter-clockwise for approx. 1 second
- Adjust volume up:** Turn and hold the knob Clockwise to desired volume level
- Adjust volume down:** Turn and hold the knob Counter-clockwise to desired volume level

WIRING INSTALLATION INSTRUCTIONS:

Wire Color	Standard Wiring Method <i>(to switched power source)</i>	Alternative Wiring Method <i>(non-switched power source)</i>
Red Wire 12v +	Wire to 12v positive (+) power switch (ignition or dash switch)	Unused, properly isolated and capped off
Yellow Wire 12v +	Wire to 12v positive (+) continuous power source (fused)	Wired to a 12v positive (+) continuous power source
Blue Wire 12v +	Wire to amp or EQ turn on input (+)	Wire to amp or EQ turn on input (+)
Black Wire 12v Ground	Wire to battery negative (-) ground terminal or ground terminal block	Wire to battery negative (-) ground terminal or ground terminal block

NOTE: To power unit on and off manually - simply push in and hold the knob until the unit powers on or off. This allows you to turn unit off if a vehicle switch is not used otherwise (In this configuration, the red wire is not used).

MOUNTING INSTRUCTIONS:

Surface Mount / Under dash Mount

Use two Phillips screws to mount controller on dash surface or under dash applications using the supplied surface/under dash mounting adapter.

Flush Mount / In-dash Mount

Remove the surface mount portion of the controller by unscrewing the main nut on the WW-BT-VC v2 body. Drill a 7/8" hole in your desired mounting location making sure that you have checked for tolerances and/or obstacles behind the dash. Once the hole is drilled, install the controller from the front and secure it with the main body nut from behind. Make sure the Bluetooth knob is correctly orientated before tightening into place.

THANK YOU FOR CHOOSING WET SOUNDS FOR YOUR HIGH PERFORMANCE AUDIO SYSTEM!