

SINGER®

a **MUELLER** brand

IN-LINE STRAINER

KEY FEATURES

- 316 Stainless Steel, large area Z plate screen
- Ductile iron, NSF approved Fusion Bonded Epoxy Coating
- Complies with AWWA C701 & C702

STANDARD MATERIALS


Body: ASTM A536-65/45/12 ductile iron, fusion bonded Epoxy coating

Seal: Buna-N

Screen: 316 Stainless Steel

Cover: 1045 Steel, fusion bonded, epoxy coated

Drain Plug: 316 Stainless Steel

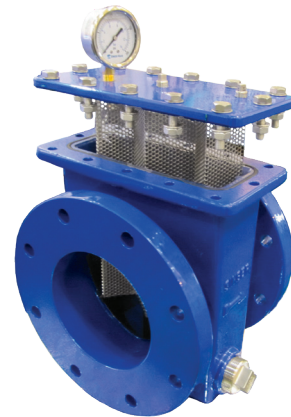




Note: Pressure Gauges are optional

PRODUCT OVERVIEW

The Singer Model In-Line Strainer is designed to protect control valves and pipelines from foreign matter and debris in the flow stream. The Z plate screen design is excellent for providing a smooth laminar flow, which is ideal for locations ahead of automatic control valves.

The Z plate screen is manufactured in corrosion resistant Stainless Steel and allows for a large flow area. It is easily removed by taking off the top cover plate. It is also supplied with flushing ports on both sides of the strainer along with an air bleed connection and connections across the screen for the installation of a differential pressure gauge if required.

PRODUCT LINE DRAWING

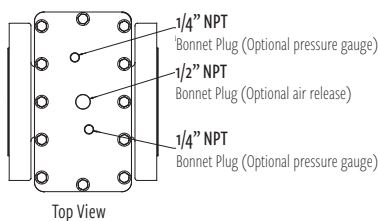

Pressure rating: 150F: 250 Psi / 300F: 400 Psi | PN 10/ PN 16: 16 bar (232 Psi) / PN 25: 25 bar (363 Psi) | Max temperature: 180 °F (82 °C)

Dimension in inches 150F / 300F Flanged

Size	A		B		D*	E	NPT Drain Plugs	Screen Perforation
	150# Flanged	300# Flanged	150# Flanged	300# Flanged				
3"	7.5	7.92	7.5	8.25	3.81	6.53	1.25	0.16
4"	7.5	8.12	9	10	4.25	7.33	1.25	0.16
6"	9	9.88	11	12.5	5.5	8.61	1.5	0.16
8"	9	10	13.5	15	6.8	9.85	1.5	0.16
10"	10	11.38	16	17.5	8.63	11.25	2	0.16
12"	12	13.38	19.13	20.5	10.13	13.11	2	0.16

Confirm availability and delivery of all sizes with factory

Dimension in milimeters PN10 / PN16 / PN 25 Flanged

Size	A		B		D*	E	NPT Drain Plugs	Screen Peforation
	PN10/ PN16 Flanged	PN25 Flanged	PN10/ PN16 Flanged	PN25 Flanged				
80 mm	190.5	201.2	190.5	209.6	96.8	165.9	31.8	4.1
100 mm	190.5	206.2	228.6	254.0	108.0	186.2	31.8	4.1
150 mm	228.6	251.0	279.4	317.5	139.7	218.7	38.1	4.1
200 mm	228.6	254.0	342.9	381.0	172.7	250.2	38.1	4.1
250 mm	254.0	289.1	406.4	444.5	219.2	285.8	50.8	4.1
300 mm	304.8	339.9	485.9	520.7	257.3	333.0	50.8	4.1

Confirm availability and delivery of all sizes with factory

Size	Pressure Drop			Size	L/s	Kpa
	usgpm	psi				
3"	460	3.2		80mm	29	22.06
4"	800	2.3		100mm	50.4	15.8
6"	1800	2.2		150mm	113.5	15.17
8"	3100	2.4*		200mm	195.5	16.55*

*Estimated

SPECIFICATIONS

- The Strainer shall be a Singer Model In-Line Strainer, ANSI Class 150 (ANSI 300, ANSI Flanges drilled to PN 10/16/ 25 or 40) pressure rating/flange standard.
- The strainer body shall be constructed of ASTM A536-65/45/12 ductile iron or equivalent.
- The cover shall be constructed of 1045 Steel or equivalent.
- The strainer shall have a protective NSF approved Fusion Bonded Epoxy Coating, externally and internally that shall conform to ANSI/AWWA C116/A21.16 (current version) specification. No matching of external parts after final coating will be acceptable to ensure continuous coating surface throughout the entire strainer.
- Strainer screen shall be a 316 Stainless Steel Z plate, drilled/punched with holes to give greater than the pipe area to minimize head loss.
- Strainer Screen shall be removable through the top cover without the need for any special tools. Flat or curved screen will not be acceptable.
- All external fasteners shall be 18-8 Stainless Steel with 18-8 Stainless Steel washers. Mild steel studs or bolts will not be acceptable.
- Drain ports and connection tappings will be supplied with 316 stainless steel plugs.

For more information about us or to view our full line of water products, please visit www.singervalve.com or call Singer customer service at 833.367.6835.

Mueller refers to one or more of Mueller Water Products, Inc. a Delaware corporation ("MWP"), and its subsidiaries. MWP and each of its subsidiaries are legally separate and independent entities when providing products and services. MWP does not provide products or services to third parties. MWP and each of its subsidiaries are liable only for their own acts and omissions and not those of each other. MWP brands include Mueller®, Echologics®, Hydro Gate®, Hydro-Guard®, HYMAX®, Jones®, Krausz®, Mi.Net®, Milliken®, Pratt®, Prat Industrial®, Singer®, and U.S. Pipe Valve & Hydrant. Please see muellerwp.com/brands and krauszusa.com to learn more.

Copyright © 2019 Mueller SV, Ltd. All Rights Reserved. The trademarks, logos and service marks displayed in this document are the property of Mueller Water Products, Inc., its affiliates or other third parties. Products above marked with a section symbol (§) are subject to patents or patent applications. For details, visit www.mwppat.com. These products are intended for use in potable water applications. Please contact your Mueller Sales or Customer Service Representative concerning any other application(§).

F14248 12/19

