

## SPECIFICATIONS (GI-SS-750)


1. 4" inlet/outlet (No-Hub)
2. Liquid capacity: 750 U.S. Gallons 2,840 litres
3. Grease Retention Capacity at Flow Rate of 100 GPM: 3,492 lbs. (485 Gallons)
4. Grease Retention Capacity at Flow Rate of 250 GPM: 1,916 lbs. (266 Gallons)
5. Unit weight with standard covers: 1,105 lbs.
6. Made from rotationally molded High Density Polypropylene (HDPE)
7. Made in USA / Limited Lifetime Warranty / Both indoor and outdoor use



**CERTIFIED  
MANAGEMENT SYSTEM**  
- ISO 9001:2015

Suffix	Optional Variations
-AK	Anchor kit (set of two)
-C	Lid extension (specify dimension required)
-COA	Coalescer Pack
-DI	Ductile iron lid & collar
-DP	Dosing pump
-EP	Enzyme port
-FL-C	Membrane clamp kit
-F6	6" No Hub Inlet / Outlet connection (flow rate of 700 GPM with 6" connections)
-F8	8" No Hub Inlet / Outlet connection (fabricated stainless steel) (flow rate of 1,200 GPM with 8" connections)
-HLA	High level alarm and float switch (to be installed on site)
-LHSI	4" no hub inlet on left hand side
-LHSO	4" no hub outlet on left hand side
-POK	Remote pump out kit
-RHSI	4" no hub inlet on right hand side
-RHSO	4" no hub outlet on right hand side
-RPO	4" Remote pump outlet connections on top of interceptor - specify location and number required
-SB	Sediment bucket
-SP	External Sampling port - inline, high connections
-SP-L	External Sampling port - inline, low connections
-SP-OF	External Sampling port - offset
-V	Vent connection - 4" (specify number required and location - side and / or top)

## GG-SS-750 Gravity Grease Interceptor

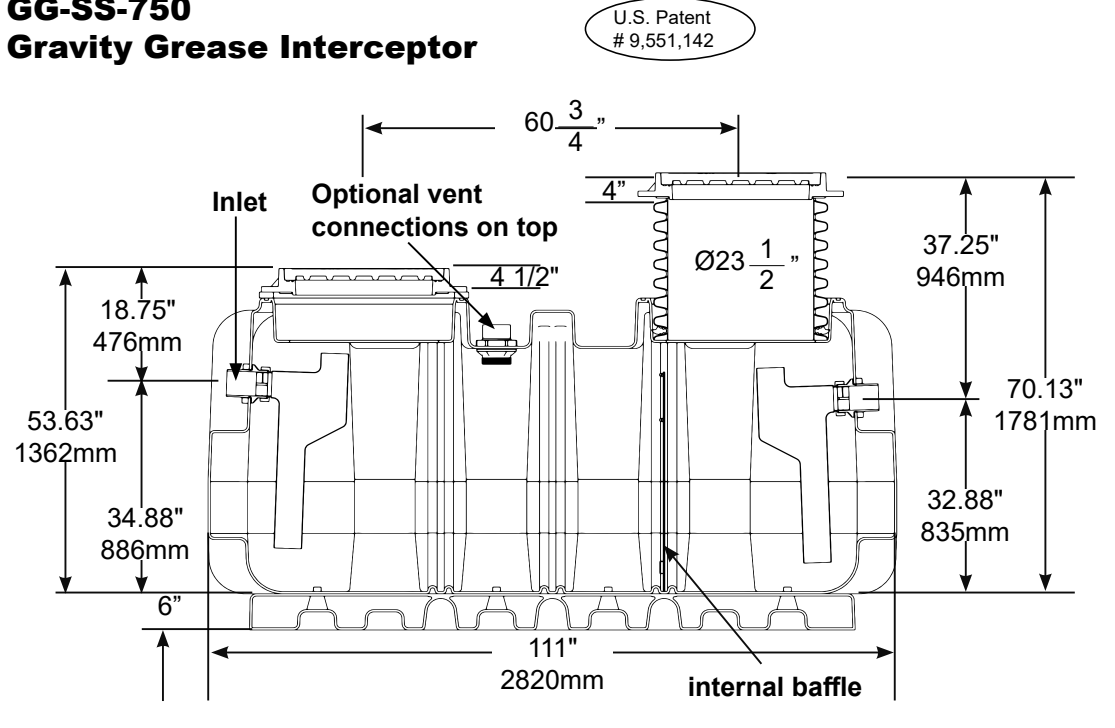

The GI-SS-750 is tested and certified to the ASME A112.14.3, CSA B481 and ANSI Z1001 Standards and listed with I.A.P.M.O.

SIGNATURE OF APPROVAL: \_\_\_\_\_

COMPANY: \_\_\_\_\_

DATE OF APPROVAL: \_\_\_\_\_

### SERIES PART NUMBER: SS (GREASE)

**DESCRIPTION:** T&C SS Series high density polyethylene (H.D.P.E.) grease interceptor.

Other sizes: 500, 1000, 1250, 1300, 1500, 2000 (liquid holding capacity - gallons) Not tested to PDI standards.