

**SPECIFICATIONS - PART NO. GI-XL-75**

1. 4" inlet/outlet Sch. 40 (No-Hub)
2. Max flow rate: 75 GPM / Liquid capacity: 140 Gallons
3. Max grease capacity: 501 lbs (70 gallons)
4. Max solids/sediment capacity: 105 Gallons
5. Unit weight w/std. covers: 150 lbs.
6. H-20, 20,000 lb. load rated, bolted, gas/water tight composite covers.
7. Maximum operating temperature 190° F continuous.
8. Made from rotationally molded High Density Polypropylene (HDPE)
9. Made in USA / Limited Lifetime Warranty / Both indoor and outdoor use




**TOWN & COUNTRY PLASTICS**  
Customized For Precision

**SUBMITTAL SHEET**

### GI-XL-75 HDPE Grease Interceptor

U.S. Patent  
# 9,551,142

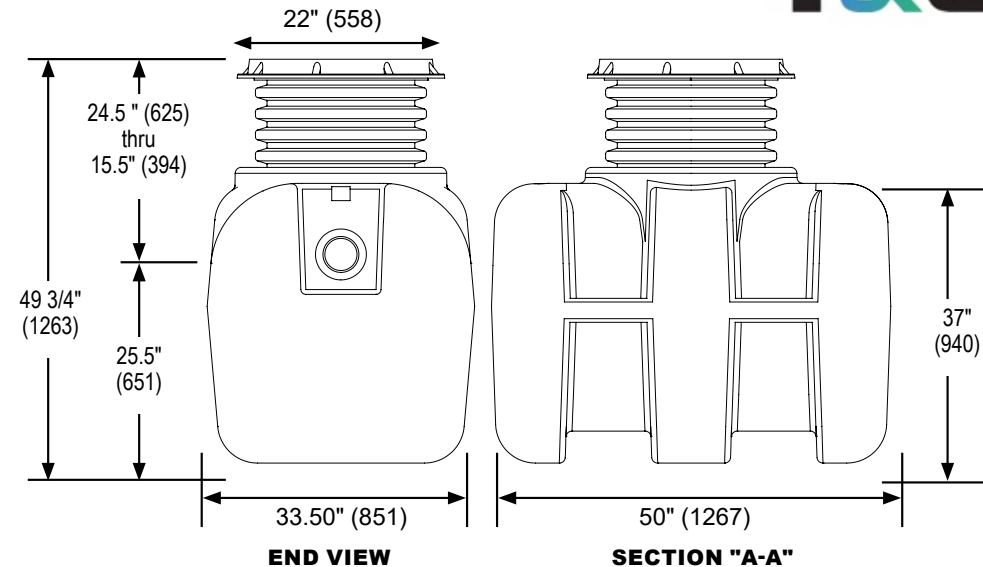

\*Note: The GI-XL-75 does not meet PDI standard if outfitted with the use of an internal flow control (-OP suffix). The PDI standard is only valid with the use of an external flow control fitting.



The GI-XL-75 is tested and certified to the following standards: PDI-G-101, ASME A112.14.3, CSA B481.1 and is listed with IAPMO.

**SERIES PART NUMBER: XL (GREASE)**

**DESCRIPTION:**  
T&C XL Series high density polyethylene (H.D.P.E.) grease interceptor.  
Available Sizes: 75 GPM (XL-75) and 100 GPM (XL-100)



**TOWN & COUNTRY PLASTICS**  
Customized For Precision

Town and Country Plastics, LLC, 10-B Timber Lane, Marlboro, NJ 07746  
1-732-780-5300 • Fax 1-732-294-0001  
www.tandcplastics.com • sales@tandcplastics.com

Optional Variations	Model No.
Anchor kit (set of four) - for 75 GPM HDPE int.	XL-AK
6" no hub inlet + outlet-(for each piece-2 pcs req. per int.)	XL-F6
Lid extension (specify "C" dimension req.) - (This is up to a 44" high extension)	XL-EXT-44
PDI plate and external vented flow control fitting to meet PDI Standards)	XL-PDI
Lid extension from 44" to 72" (specify "C" dimension req.)	XL-EXT-72
4" Remote pump outlet connections on top of interceptor - specify location and number required	XL-RPO
High level alarm and float switch (to be installed on site)	XL-HLA
4" no hub inlet on left hand side	XL-LHI
4" no hub outlet on left hand side	XL-LHO
Remote pump out kit	XL-POK
4" no hub inlet on right hand side	XL-RHI
4" no hub outlet on right hand side	XL-RHO
Sediment bucket - for 75 GPM HDPE Int.	SB-75
Sediment bucket - for 100 GPM HDPE Int.	SB-100
External Sampling port - inline, high connections	XL-SP-H
Female threaded connections (for each piece-2 pcs req. per int.)	XL-PF
External Sampling port - inline, low connections	XL-SP-L
External Sampling port - offset	XL-SP-OF

**SIGNATURE OF APPROVAL:** \_\_\_\_\_

**COMPANY:** \_\_\_\_\_

**DATE OF APPROVAL:** \_\_\_\_\_