

SPECIFICATIONS (OI-SS-1500)


1. 4" inlet/outlet (No-Hub)
2. Liquid capacity: 1500 U.S. Gallons 5,680 Litres
3. Grease Retention Capacity at Flow Rate of 100 GPM: 3,492 lbs. (485 Gallons)
4. Grease Retention Capacity at Flow Rate of 250 GPM: 1,916 lbs. (266 Gallons)
5. Unit weight with standard covers: 1,260 lbs.
6. Made from rotationally molded High Density Polypropylene (HDPE)
7. Made in USA / Limited Lifetime Warranty / Both indoor and outdoor use



**CERTIFIED
MANAGEMENT SYSTEM
- ISO 9001:2015**

OI-SS-1500 Gravity Oil Interceptor

U.S. Patent
9,551,142

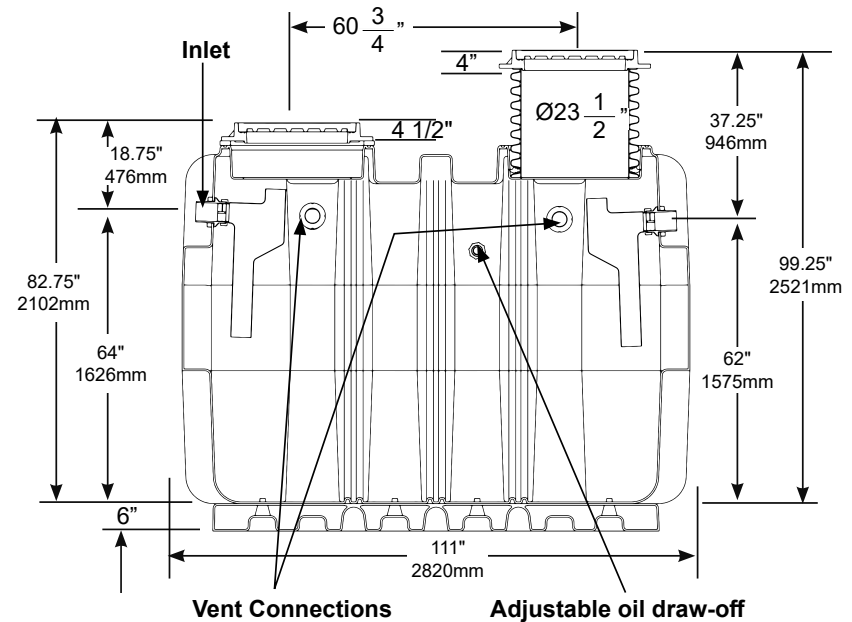

SIGNATURE OF APPROVAL: _____

COMPANY: _____

DATE OF APPROVAL: _____

SERIES PART NUMBER: OI-SS

DESCRIPTION: T&C SS Series high density polyethylene (H.D.P.E.) oil interceptor.

Other sizes: 500, 750, 1000, 1250 1300, 2000 (liquid holding capacity - gallons) Not tested to PDI standards.