SPECIFICATIONS (OI-SS-750)

- 1. 4" inlet/outlet (No-Hub)
- Liquid capacity: 750 U.S. Gallons 2,840 Litres
- Grease Retention Capacity at Flow Rate of 100 GPM: 3,492 lbs. (485 Gallons)
- Grease Retention Capacity at Flow Rate of 250 GPM: 1,916 lbs. (266 Gallons)
- Unit weight with standard covers: 1,025 lbs.
- Made from rotationally molded High Density Polypropylene (HDPE)
- Made in USA / Limited Lifetime Warranty / Both indoor and outdoor use









SUBMITTAL SHEET

OI-SS-750 Gravity Oil Interceptor

U.S. Patent # 9.551.142



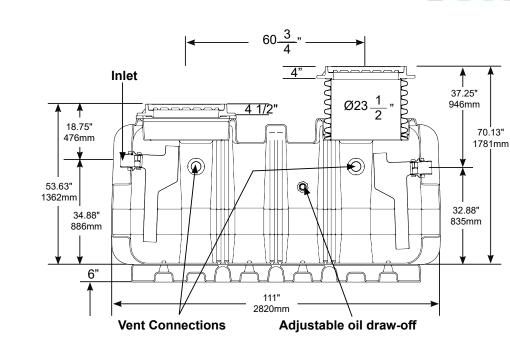

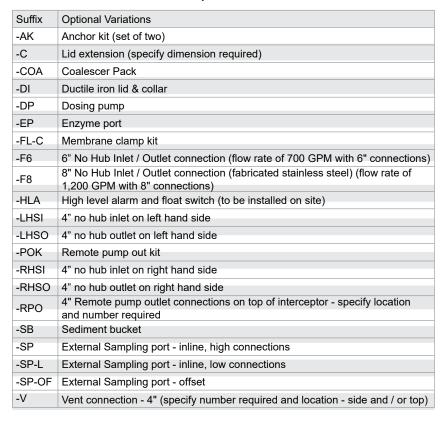

SIGNATURE OF APPROVAL: COMPANY: DATE OF APPROVAL:

SERIES PART NUMBER: 01-SS)

DESCRIPTION: T&C SS Series high density polyethylene (H.D.P.E.) oil interceptor.

Other sizes: 500, 1000, 1250 1300, 1500, 2000 (liquid holding capacity - gallons) Not tested to PDI standards.

N	

TOWN & COUNTRY PLASTICS

Customized For Precision

Town and Country Plastics, LLC, 10-B Timber Lane, Marlboro, NJ 07746 1-732-780-5300 • Fax 1-732-294-0001 www.tandcplastics.com • sales@tandcplastics.com