


SPECIFICATIONS - PART NO. OI-XL-100

1. 4" inlet/outlet Sch. 40 (No-Hub)
2. Max flow rate: 100 GPM / Liquid capacity: 300 Gallons
3. Max Liquid capacity: 1150 lbs. (160 Gallons)
4. Max solids/sediment capacity: 160 Gallons
5. Unit weight w/std. covers: 275 lbs.
6. H-20, 20,000 lb. load rated, bolted, gas/water tight composite covers.
7. Maximum operating temperature 190° F continuous.
8. Made from rotationally molded High Density Polypropylene (HDPE)
9. Made in USA / Limited Lifetime Warranty / Both indoor and outdoor use



OI-XL-100 HDPE Oil Interceptor

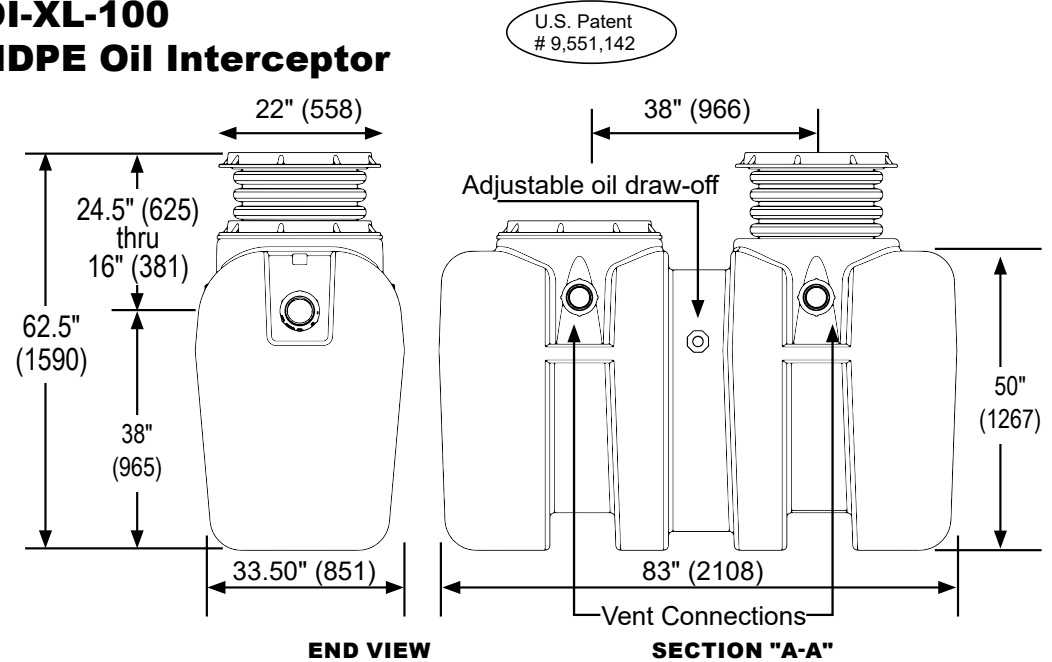

*Note: The OI-XL-100 does not meet PDI standard if outfitted with the use of an internal flow control (-OP suffix). The PDI standard is only valid with the use of an external flow control fitting.



The OI-XL-100 is tested and certified to the following standards: PDI-G-101, ASME A112.14.3, CSA B481.1 and is listed with IAPMO.

SERIES PART NUMBER: XL (OIL)

DESCRIPTION:
T&C XL Series high density polyethylene (H.D.P.E.) oil interceptor.
Available Sizes: 75 GPM (XL-75) and 100 GPM (XL-100)

SIGNATURE OF APPROVAL: _____

COMPANY: _____

DATE OF APPROVAL: _____