

SPECIFICATIONS - PART NO. OI-XL-75

1. 4" inlet/outlet Sch. 40 (No-Hub)
2. Max flow rate: 75 GPM / Liquid capacity: 140 Gallons
3. Max Liquid capacity: 750 lbs. (105 Gallons)
4. Max solids/sediment capacity: 105 Gallons
5. Unit weight w/std. covers: 150 lbs.
6. H-20, 20,000 lb. load rated, bolted, gas/water tight composite covers.
7. Maximum operating temperature 190° F continuous.
8. Made from rotationally molded High Density Polypropylene (HDPE)
9. Made in USA / Limited Lifetime Warranty / Both indoor and outdoor use




TOWN & COUNTRY PLASTICS
Customized For Precision

SUBMITTAL SHEET

| Optional Variations | Model No. |
|--|-----------|
| Anchor kit (set of four) - for 75 GPM HDPE int. | XL-AK |
| 6" no hub inlet + outlet-(for each piece-2 pcs req. per int.) | XL-F6 |
| Lid extension (specify "C" dimension req.) - (This is up to a 44" high extension) | XL-EXT-44 |
| PDI plate and external vented flow control fitting to meet PDI Standards) | XL-PDI |
| Lid extension from 44" to 72" (specify "C" dimension req.) | XL-EXT-72 |
| 4" Remote pump outlet connections on top of interceptor - specify location and number required | XL-RPO |
| High level alarm and float switch (to be installed on site) | XL-HLA |
| 4" no hub inlet on left hand side | XL-LHI |
| 4" no hub outlet on left hand side | XL-LHO |
| Remote pump out kit | XL-POK |
| 4" no hub inlet on right hand side | XL-RHI |
| 4" no hub outlet on right hand side | XL-RHO |
| Sediment bucket - for 75 GPM HDPE Int. | SB-75 |
| Sediment bucket - for 100 GPM HDPE Int. | SB-100 |
| External Sampling port - inline, high connections | XL-SP-H |
| Female threaded connections (for each piece-2 pcs req. per int.) | XL-PF |
| External Sampling port - inline, low connections | XL-SP-L |
| External Sampling port - offset | XL-SP-OF |

OI-XL-75 HDPE Oil Interceptor

U.S. Patent
9,551,142

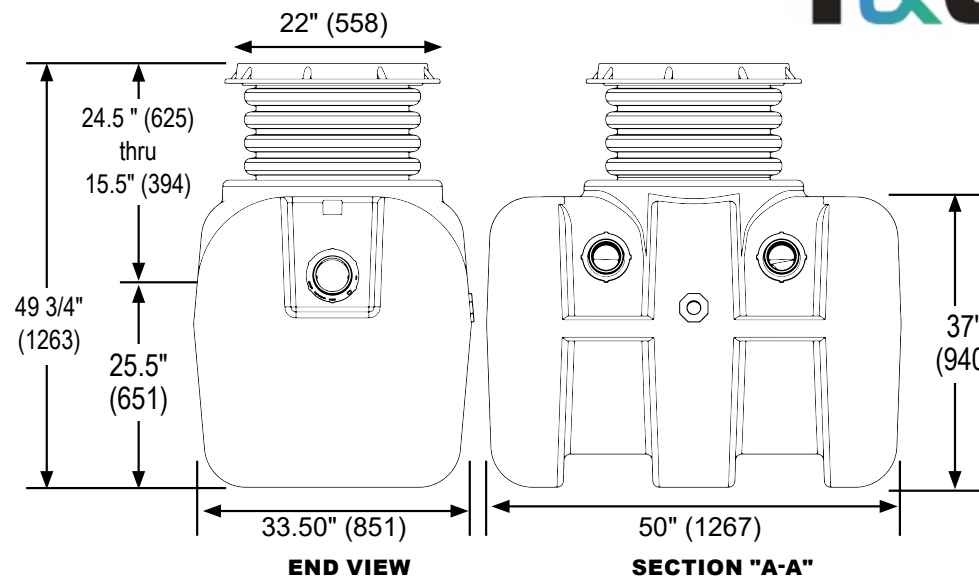

*Note: The OI-XL-75 does not meet PDI standard if outfitted with the use of an internal flow control (-OP suffix). The PDI standard is only valid with the use of an external flow control fitting.



The OI-XL-75 is tested and certified to the following standards: PDI-G-101, ASME A112.14.3, CSA B481.1 and is listed with IAPMO.

SIGNATURE OF APPROVAL: _____

COMPANY: _____

DATE OF APPROVAL: _____

SERIES PART NUMBER: XL (OIL)

DESCRIPTION:
T&C XL Series high density polyethylene (H.D.P.E.) oil interceptor.
Available Sizes: 75 GPM (XL-75) and 100 GPM (XL-100)



TOWN & COUNTRY PLASTICS
Customized For Precision

Town and Country Plastics, LLC, 10-B Timber Lane, Marlboro, NJ 07746
1-732-780-5300 • Fax 1-732-294-0001
www.tandcplastics.com • sales@tandcplastics.com