

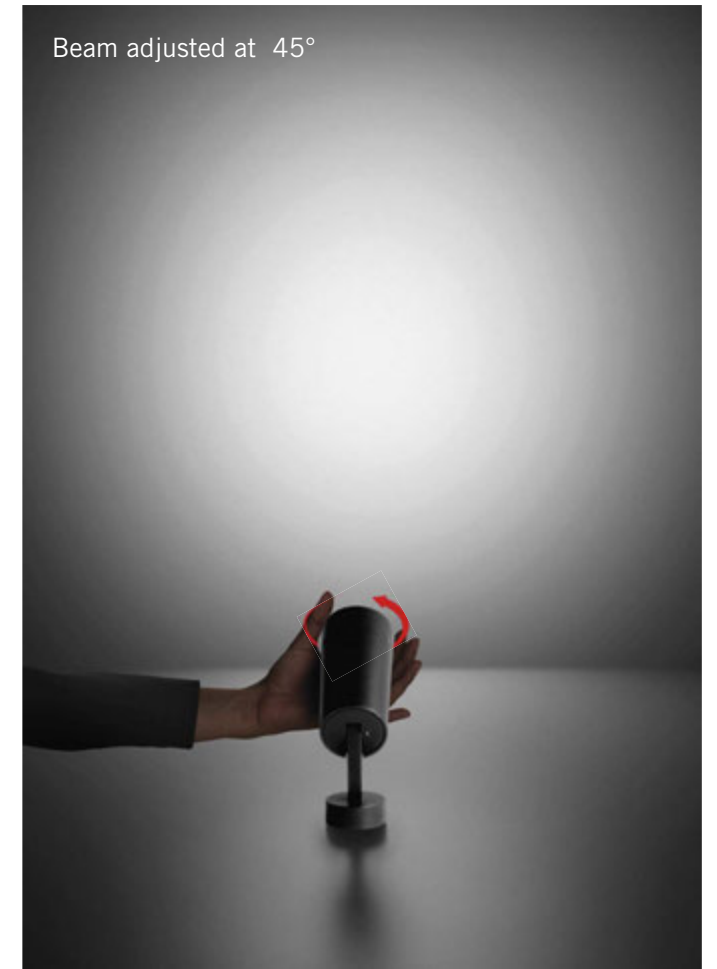
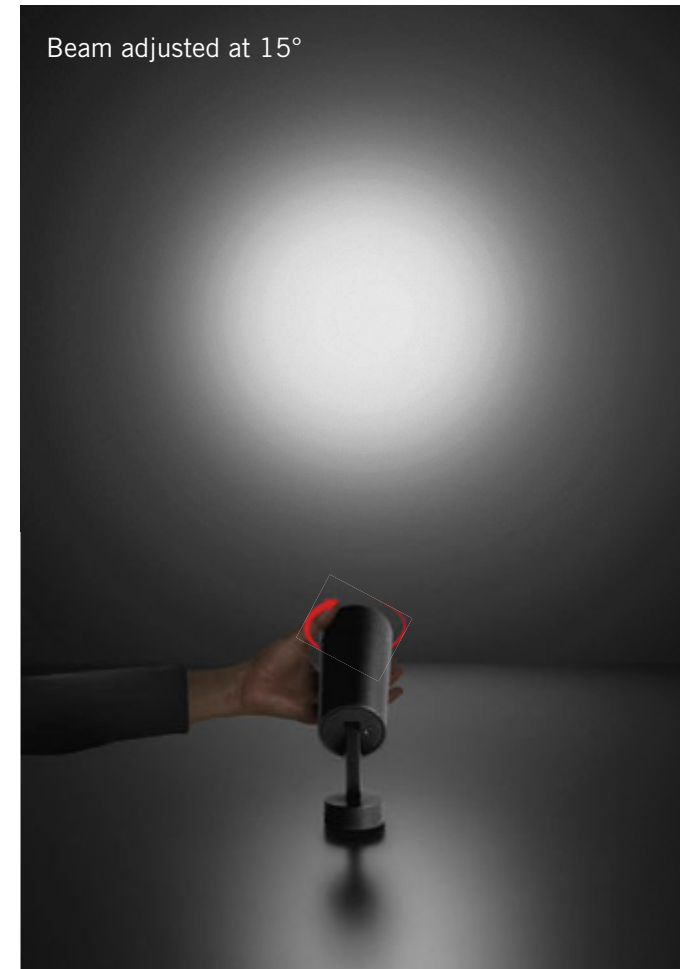


SIMES

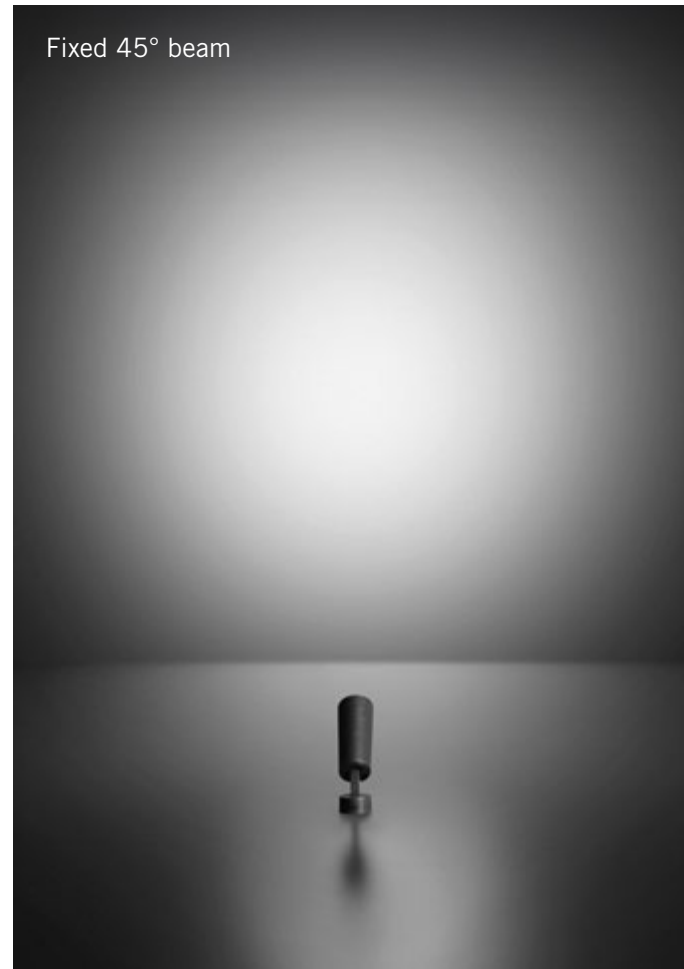

Flower  
Tiltable Microprojector

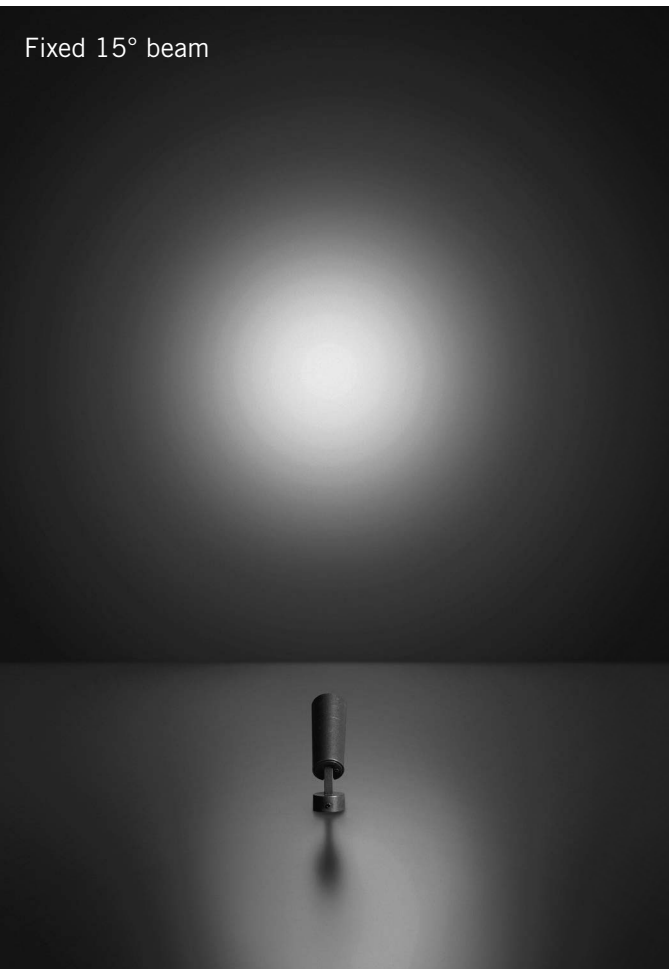

# Flower

## Flower, micro spotlight with adjustable optics.

Flower is proposed in 2 sizes: Flower Ø25, extremely small, blends into the scene when installed; Flower Ø35, slightly larger, offers high lighting performance while maintaining minimal dimensions. Both versions are available with a narrow 15° fixed optic or with a 45° medium fixed optic. The clean design with no visible cable comes together with high visual comfort due to the rearward optics and the use of special filters that refine the beam.



# Flower Zoom

## Multi focal projector, which is able to control the beam angle with a simple rotational movement.

Flower ZOOM Ø60 and Ø75 differ from Flower Ø25 and Ø35 for the possibility of changing the beam angle even once installed. The transition from a concentrated SPOT 15° beam to a large FLOOD 45° thus takes place smoothly and gradually, offering maximum comfort. The modification takes place through a manual rotation of the front bezel.







**Flower ZOOM 15°**  
Narrow beam  
for an aiming light

Flower Zoom's Spot 15° ensures high cone precision of light characterized by an absolutely comfortable and glare-free distribution. The on-site zoom setting allows to shorten lighting design times because it allows to optimize the beam width according to the real impact of the subject in the scene. In the image you can see the light accent focused on the architectural element of the balcony.



**Flower ZOOM 45°**  
Wide beam  
for more diffused light

In Flood 45° mode, Flower Zoom succeeds to involve a very wide scene without defining a focal point but distributing the light extremely evenly on the surface. It is the ideal solution for illuminating large surfaces, urban contexts, green areas, trees and shrubs subject to change over time. The gradual adjustment that brings the beam from 15°- to 45°- and vice versa is always possible and takes place with a simple manual rotation of the front bezel. The image shows a more distributed illumination on the entire facade.







Pole Ø 38 for Flower  
Ø 60 for Flower Zoom



**Flower**  
Wall



**Flower ZOOM**  
Wall

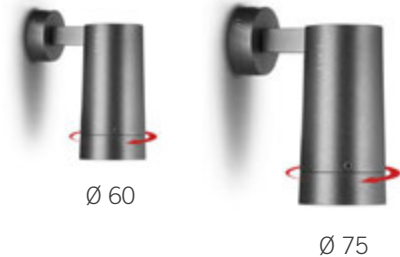

**Flower ZOOM**  
Arm



**Flower**  
Arm



# Variety in applications

All the Flower family variants can be used for wall applications, on stake, as bollard, with arm and on pole. The great flexibility of the application lead to satisfy multiple design needs.

**Flower**  
Stake



**Flower ZOOM**  
Stake



**Flower**  
Bollard



**Flower ZOOM**  
Bollard




**FLOWER 25**  
Tiltable projector with fixed optic



Flower  
on wall

Flower and Flower Zoom are designed to be placed in architectural and landscape exteriors.

The whole range in 4 versions is conceived to be installed on wall, on ground with a stake or directly to the pole. Thanks to their material finishes and natural colors, Flower and Flower Zoom disappear in any context, easily anchoring to facades, pergolas and gazebos. A camouflage of shapes and colors to enhance the scene with light, disappearing as a whole.

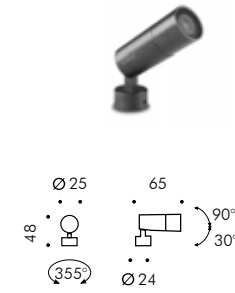

**S.1600W**  
1 HIGH-POWER LED **3000K** CRI90 202lm  
Rated luminaire luminous flux 160lm  
Rated input power 3,0W **24V DC**  
Computer-simulated photometrics

h(m)	14° Ø(m)	3000K E(lx)
1	0.25	1884
2	0.49	471
3	0.74	209
4	0.98	118
5	1.23	75

**S.1601W**  
1 HIGH-POWER LED **3000K** CRI90 202lm  
Rated luminaire luminous flux 143lm  
Rated input power 3,0W **24V DC**  
Computer-simulated photometrics




h(m)	26° Ø(m)	3000K E(lx)
1	0.45	581
2	0.91	145
3	1.36	65
4	1.82	36
5	2.27	23

Color Temperature available on request with no surcharge: **2700K, 4000K**  
Beam lenses available on request with no surcharge: **63°**  
Requires constant voltage remote power supply **24V DC**



**S.1608**  
**VISOR** for FLOWER 25  
Colour: black (cod .09)

**FLOWER 35**  
Tiltable projector with fixed optic

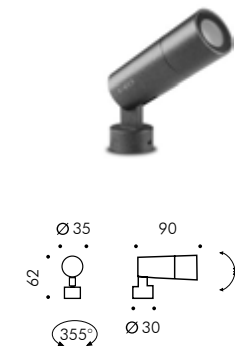

**S.1620W**  
1 HIGH-POWER LED **3000K** CRI90 501lm  
Rated luminaire luminous flux 343lm  
Rated input power 6,0W **24V DC**  
Computer-simulated photometrics

h(m)	13° Ø(m)	3000K E(lx)
1	0.23	3810
2	0.46	953
3	0.68	423
4	0.91	238
5	1.14	152

**S.1621W**  
1 HIGH-POWER LED **3000K** CRI90 501lm  
Rated luminaire luminous flux 301lm  
Rated input power 6,0W **24V DC**  
Computer-simulated photometrics

h(m)	38° Ø(m)	3000K E(lx)
1	0.69	642
2	1.39	161
3	2.08	71
4	2.77	40
5	3.46	26



Color Temperature available on request with no surcharge: **2700K, 4000K**  
Beam lenses available on request with no surcharge: **24°**  
Requires constant voltage remote power supply **24V DC**



**S.1628**  
**VISOR** for FLOWER 35  
Colour: black (cod .09)



**FLOWER ZOOM 60**  
Tilttable projector with adjustable optic

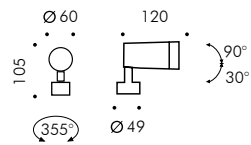

**S.1650W**  
1 HIGH-POWER LED **3000K** CRI90 860lm  
Rated luminaire luminous flux 630lm  
Rated input power 10W **24V DC**  
Computer-simulated photometrics



**Color Temperature available on request with no surcharge:  
2700K, 4000K**

**Requires constant voltage remote power supply 24V DC**



**S.1658**  
**VISOR** for FLOWER ZOOM 60  
Colour: black (cod .09)

**FLOWER ZOOM 75**  
Tilttable projector with adjustable optic

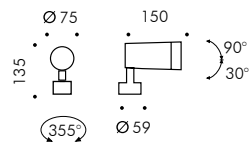

**S.1660W**  
1 HIGH-POWER LED **3000K** CRI90 1293lm  
Rated luminaire luminous flux 945lm  
Rated input power 15W  
220V-240V AC 50/60Hz Non Dimmerabile  
Computer-simulated photometrics

**Color Temperature available on request with no surcharge:  
2700K, 4000K**



**S.1668**  
**VISOR** for FLOWER ZOOM 75  
Colour: black (cod .09)

**Colors**

- .07 Dark green
- .20 Burnished bronze
- .24 Anthracite grey

**IP protection**

IP66

**Insulation class**

CLASS III ⚡  
CLASS I ⚡ FLOWER ZOOM 75

**Mechanical resistance**

IK 07



"Villa Fioralisse" hotel and restaurant, Gardone Riviera, Italy © ph. Mario Bertani



# Flower on pole

## Micro spotlights in four sizes for pole application

Flower and Flower ZOOM pole attached are flexible and innovative lighting solutions to light up green areas, bushes and walkways.



## POLES FOR FLOWER 25 AND FLOWER 35

### POLE Ø38 FOR FLOWER

**S.2805**

**Ø 38 mm CYLINDRICAL POLE**  
Pole total height 3000mm

FLOWER 25 and FLOWER 35 can be installed directly on poles with diameter from Ø38mm to Ø60mm.



### FLANGE FOR POLE Ø38

**S.2806**

**PLANTED ROOT FOR S.2805**  
Pole total height 1000mm  
To be buried for 500mm





POLE Ø60 FOR FLOWER ZOOM

**S.2807**

**Ø 60 mm CYLINDRICAL POLE**  
Pole total height 3500mm

Flower ZOOM can be installed on poles  
Ø60/76mm using the pole adaptors.

Code S.1657 for Flower ZOOM 60 mm  
Code S.1667 for Flower ZOOM 75 mm



**S.1657**

**FLANGE FOR POLE Ø60/76mm  
INSTALLATION**

Flange in die-cast aluminium  
for FLOWER ZOOM 60  
Colour: black (cod .09)



Ø 60




**S.1667**

**FLANGE FOR POLE Ø60/76mm  
INSTALLATION**

Flange in die-cast aluminium  
for FLOWER ZOOM 75  
Colour: black (cod .09)



Ø 75

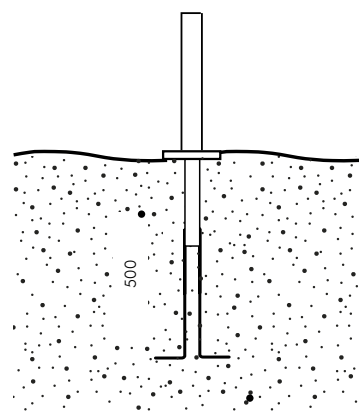

ROOT FOR POLE Ø60

**S.2808**

**PLANTED ROOT AS ACCESSORY**  
Pole total height 1000mm  
To be buried for 500mm



Private villa, Italy - Arch. Varschi, Geom. Bertendis © ph. Mario Bertani



# Flower on stake

## A simple solution for garden installation

The stake version is very easy to install: it is possible to apply Flower directly into the green, to light up the surrounding area.



## STAKE FOR FLOWER



**S.1609**  
**STAKE for FLOWER 25 and FLOWER 35**  
in polypropylene for temporary applications.

FLOWER 25 and FLOWER 35 can be installed on the stake S.1609 for the ground application.



## STAKE FOR FLOWER ZOOM



**S.1659**  
**STAKE for FLOWER ZOOM 60 and FLOWER ZOOM 75**  
in polypropylene for temporary applications.

FLOWER ZOOM 60 and FLOWER ZOOM 75 can be installed on the stake S.1659 for the ground application.









# Flower bollard with stake



**A thin stem to simulate the shapes of nature.**

The pole version stands out for its graceful and slender design camouflaging inside flower boxes, flowerbeds, bushes and shrubs. Flower and Flower ZOOM combine aesthetics with lighting performances that are further expanded by the possibility of changing the beam width with the ZOOM version.




## FLOWER 25 BOLLARD INCLUDING STAKE

Flower 25  
Fix optic

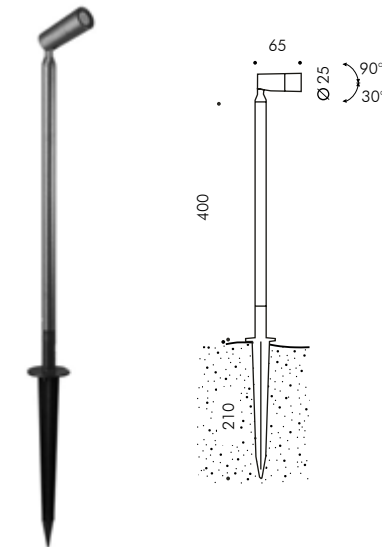

**S.1610W**  
1 HIGH-POWER LED **3000K** CRI90 202lm  
Rated luminaire luminous flux 160lm  
Rated input power 3,0W **24V DC**  
Computer-simulated photometrics  
Stake included

h(m)	Ø(m)	3000K E(lx)
1	0.25	1884
2	0.49	471
3	0.74	209
4	0.98	118
5	1.23	75



**S.1611W**  
1 HIGH-POWER LED **3000K** CRI90 202lm  
Rated luminaire luminous flux 143lm  
Rated input power 3,0W **24V DC**  
Computer-simulated photometrics  
Stake included

h(m)	Ø(m)	3000K E(lx)
1	0.45	581
2	0.91	145
3	1.36	65
4	1.82	36
5	2.27	23

**Color Temperature available on request with no surcharge: 2700K, 4000K**  
**Beam lenses available on request with no surcharge: 63°**

**Requires constant voltage remote power supply 24V DC**



**S.1608**

**VISOR** for FLOWER 25  
Colour: black (cod .09)




## FLOWER 35 BOLLARD INCLUDING STAKE

Flower 35  
Fix optic

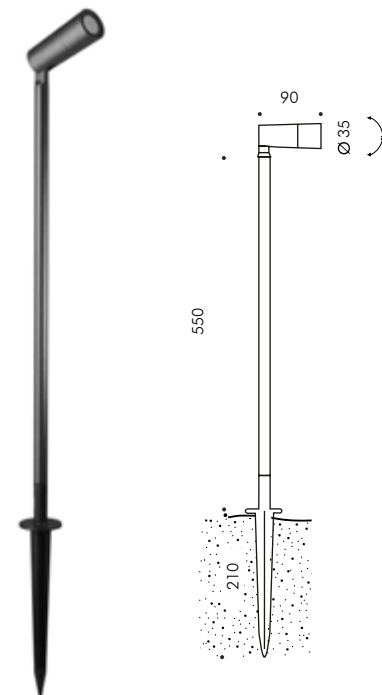

**S.1630W**  
1 HIGH-POWER LED **3000K** CRI90 501lm  
Rated luminaire luminous flux 343lm  
Rated input power 6,0W **24V DC**  
Computer-simulated photometrics  
Stake included

h(m)	Ø(m)	3000K E(lx)
1	0.23	3810
2	0.46	953
3	0.68	423
4	0.91	238
5	1.14	152



**S.1631W**  
1 HIGH-POWER LED **3000K** CRI90 501lm  
Rated luminaire luminous flux 301lm  
Rated input power 6,0W **24V DC**  
Computer-simulated photometrics  
Stake included

h(m)	Ø(m)	3000K E(lx)
1	0.69	642
2	1.39	161
3	2.08	71
4	2.77	40
5	3.46	26

**Color Temperature available on request with no surcharge: 2700K, 4000K**  
**Beam lenses available on request with no surcharge: 24°**

**Requires constant voltage remote power supply 24V DC**

**S.1628**


**VISOR** for FLOWER 35  
Colour: black (cod .09)





FLOWER ZOOM 60 ARM (Bollard version with stake accessory)

Flower ZOOM 60  
with adjustable optic

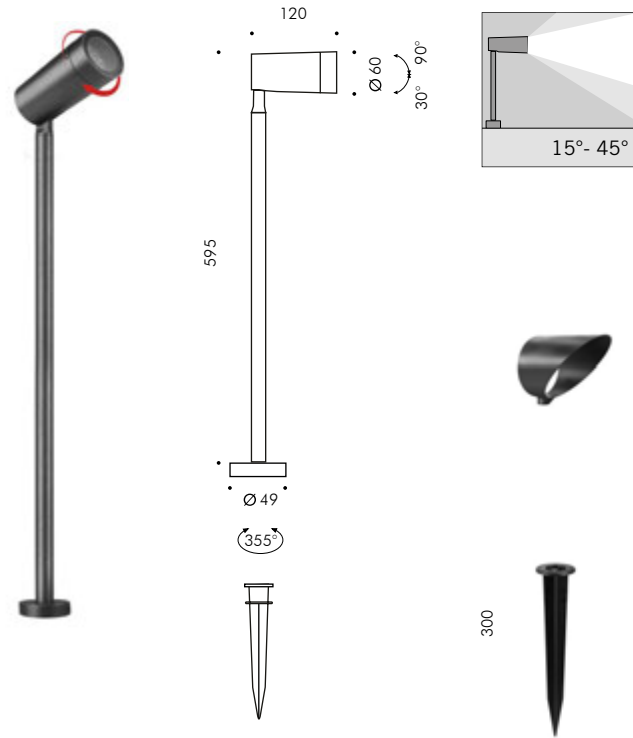

**S.1655W**

1 HIGH-POWER LED **3000K** CRI90 860lm  
Rated luminaire luminous flux 630lm  
Rated input power 10W **24V DC**  
Computer-simulated photometrics

Color Temperature available on request with  
no surcharge: 2700K, 4000K

Requires constant voltage remote power  
supply 24V DC

**S.1658**

**VISOR** for FLOWER ZOOM 60  
Colour: black (cod .09)

**S.1659**

**STAKE** for FLOWER ZOOM 60 and FLOWER  
ZOOM 75  
in polypropylene for temporary applications.



Private villa, Italy - Arch. Vareschi, Geom. Bertolotti © ph. Marco Bertani







# Flower with arm

## Thin, elegant end invisible in facade


Designed specifically for facade lighting of signs, architectural elements, vertical gardens, Flower and Flower ZOOM with arm meet specific design needs with well-defined light effects with narrow and medium beam (Flower 35) or modular beam (Flower ZOOM 60). Both Flower and Flower Zoom can also be anchored to the floor and be used as a thin adjustable bollard.

### FLOWER 35 WITH ARM Tilttable projector with fixed optic

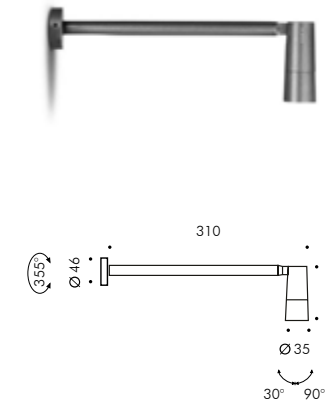

**S.1625W**  
1 HIGH-POWER LED **3000K** CRI90 501lm  
Rated luminaire luminous flux 343lm  
Rated input power 6,0W **24V DC**  
Computer-simulated photometrics

h(m)	Ø(m)	3000K E lx
1	0.23	3810
2	0.46	953
3	0.68	423
4	0.91	238
5	1.14	152



**S.1626W**  
1 HIGH-POWER LED **3000K** CRI90 501lm  
Rated luminaire luminous flux 301lm  
Rated input power 6,0W **24V DC**  
Computer-simulated photometrics

h(m)	Ø(m)	3000K E lx
1	0.69	642
2	1.39	161
3	2.08	71
4	2.77	40
5	3.46	26



Color Temperature available on request with no surcharge: **2700K, 4000K**  
Beam lenses available on request with no surcharge: **24°**

Requires constant voltage remote power supply **24V DC**



**S.1628**  
**VISOR** for FLOWER ZOOM 35  
Colour: black (cod .09)

### FLOWER 60 ZOOM WITH ARM Tilttable projector with adjustable optic

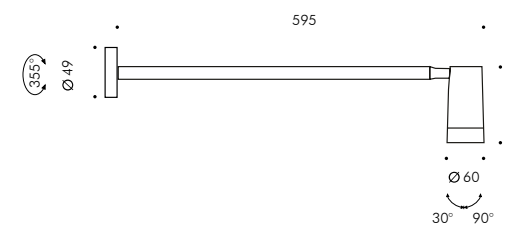

**S.1655W**  
1 HIGH-POWER LED **3000K** CRI90 860lm  
Rated luminaire luminous flux 630lm  
Rated input power 10W **24V DC**  
Computer-simulated photometrics

Color Temperature available on request with no surcharge: **2700K, 4000K**

Requires constant voltage remote power supply **24V DC**



**S.1658**  
**VISOR** for FLOWER ZOOM 60  
Colour: black (cod .09)









# SIMES

luce per l'architettura

SIMES S.p.A. VIA G. PASTORE 2/4 - 25040 CORTE FRANCA (BRESCIA) - ITALY  
Tel. (+39) 030 9860411 - Fax (+39) 030 9828308  
simes@simes.com - www.simes.com