


HAZMAT

**TRAINING READY UNIT
SITE REQUIREMENTS**

HAZMAT

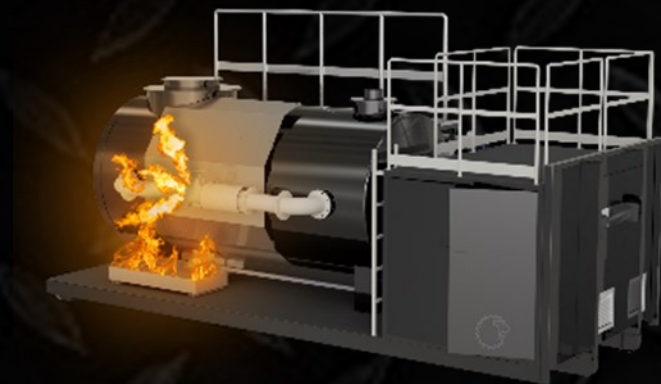

FIXED SITE



SITE PREP

- Placement area must consist of a hard, level surface with proper drainage
- Options include:
 - * Level pads on leveled crushed stone
 - * Concrete footings/piers with crushed stone
 - * Reinforced concrete slab on grade
- Clear access to the placement area sufficient for a truck, trailer, and crane
- Access must extend within 20 feet of the placement area



SPACE

- Placement area must include a minimum clear area of 20 feet by 32 feet
- Exhaust location requires a minimum of a 10 feet clearance area

MOBILE SITE

- Placement area must consist of a hard, level surface with proper vehicular access

- Placement area must include a minimum clear area of 30 feet by 40 feet

FIXED SITE

MOBILE SITE



ELECTRICAL

- Three Phase WYE 120/208 Volt, 50 amp service within 30 feet of placement area
- 30 feet distance measured from the rear corner near the technical service room
- LION will supply 30 feet cable for connection to customer supplied power source



GAS

- 3/4 inch NPT propane vapor supply with 20 PSI
- Minimum of a 500 gallon tank
- **Interchangeable Prop Flow Rate:** 64 pounds per hour maximum at 25% duty cycle
- **Rollover Prop Flow Rate:** 141 pounds per hour maximum at 20% duty cycle



WATER

- 1/2 inch waterline with a minimum of 30 PSI and maximum of 140 PSI
- Water Flow: 5.3 gallons per minute
- 1/2 inch waterline with a minimum of 30 PSI and maximum of 140 PSI
- Water Flow: 5.3 gallons per minute



OTHER

- N/A
- Grounding: Soil required for rod placement
- LION will supply a 10 feet grounding wire