




LION NFPA 1994 Class 2R and NFPA 1992 Ensemble

This Ensemble has been certified to the Ruggedized Class 2 requirements of NFPA 1994 (2R).

Ruggedized ensembles can be used multiple times where there is no exposure to hazardous materials and CBRN terrorism agents and provide a greater level of physical hazard resistance and increased durability.

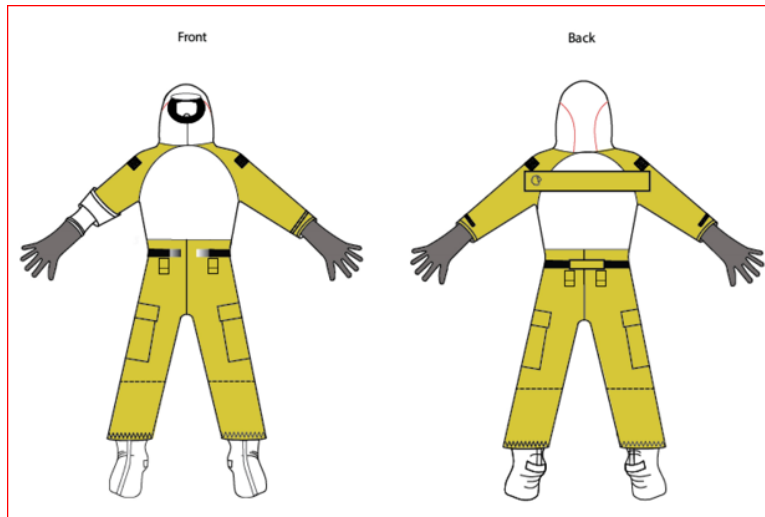

Models: CMTMRG11 AND CMTMRG21 Only

	Questions, write or call immediately: LION 7200 Poe Ave., Suite 400 Dayton, Ohio 45414. 1-800-421-2926		Cert. Mod NFPA 1994, 2018 Ed. NFPA 1992, 2018 Ed.	6690
	THIS THIS NON-ENCAPSULATING LIQUID SPLASH-PROTECTIVE ENSEMBLE MEETS THE BASIC REQUIREMENTS OF NFPA 1992, STANDARDS ON LIQUID SPLASH-PROTECTIVE ENSEMBLES AND CLOTHING FOR HAZARDOUS MATERIALS EMERGENCIES, 2018 EDITION, AND FOR THE ADDITIONAL REQUIREMENTS IF INDICATED BELOW			
ADDITIONAL REQUIREMENT		YES	NO	
LIMITED CHEMICAL FLASH FIRE PROTECTION FOR ESCAPE ONLY IN THE EVENT OF A CHEMICAL FLASH FIRE				<input checked="" type="checkbox"/>
CLAIM OF OPTIONAL BREATHABILITY FOR GARMENT MATERIALS				<input checked="" type="checkbox"/>
THIS CLASS 2R NON-ENCAPSULATING HAZARDOUS MATERIALS AND CBRN PROTECTIVE ENSEMBLE MEETS THE REQUIREMENTS OF NFPA 1994, STANDARD ON PROTECTIVE ENSEMBLES FOR FIRST RESPONDERS TO HAZARDOUS MATERIALS EMERGENCIES AND CBRN TERRORISM INCIDENTS, 2018 EDITION, FOR THE ABOVE-NOTED CLASS.				
THE TECHNICAL DATA PACKAGE CONTAINS INFORMATION ON HAZARDOUS MATERIALS AND CBRN AGENTS AND ON CHEMICALS AND SPECIFIC CHEMICAL MIXTURES FOR WHICH THIS NON-ENCAPSULATING ENSEMBLE IS CERTIFIED, CONSULT THE TECHNICAL DATA PACKAGE.				
<small>TO BE COMPLIANT WITH NFPA 1994, THE FOLLOWING ADDITIONAL COMPONENTS MUST BE WORN IN CONJUNCTION WITH THIS HAZARDOUS MATERIALS AND PROTECTIVE ENSEMBLE AND FOR COMPLIANCE WITH NFPA 1992, THE FOLLOWING ADDITIONAL COMPONENTS MUST BE WORN IN CONJUNCTION WITH THIS LIQUID SPLASH-PROTECTIVE ENSEMBLE: ON-GUARD HAZMAX® BOOTS (87012), TINGLEY HAZPROOF™ (82330 OR 82331), THOROGOOD KNOCKDOWN ELITE (804-888, 504-888), THOROGOOD HELPFIRE RUBBER – KEVLAR (807-6000, 507-6000) OR HELPFIRE RUBBER – FELT (807-6003, 507-6003) AND G94-C3L OORE GLOVE LINER.</small>				
<small>(SEE TECHNICAL DATA PACKAGE FOR A LIST OF DETACHABLE COMPONENTS)</small>				
<small>OUTER BOOT FOOTWEAR OPTIONS WORN WITH THIS ENSEMBLE MUST MEASURE AT LEAST 200 MM (8 IN.) HIGH AND BE CERTIFIED TO NFPA 1951, 1971, 1961, 1962, or 1964.</small>				
<small>TO REDUCE THE RISK OF INJURY OR DEATH, YOU MUST ASSEMBLE AND WEAR TOGETHER ALL OF THE ABOVE ITEMS. ALWAYS MAKE SURE THAT ALL ENSEMBLE LAYERS HAVE THE PROPER OVERLAP AND THAT ALL ITEMS FIT PROPERLY. REFERENCE THE USER INSTRUCTION, SAFETY AND TRAINING GUIDE FOR PROPER DONNING AND WEARING INSTRUCTIONS.</small>				
DO NOT REMOVE THIS LABEL.				REV 2.0 10/2020



7200 Poe Avenue, Suite 400
 Dayton, OH 45414
 Phone: (800) 421-2926 or (937) 898-1949
 Fax: (877) 803-1032 or (937) 415-1994
 Internet: www.LIONprotects.com
 E-mail: Info@LIONprotects.com