

# Echo Eliminator

## CEILING & WALL PANELS

Echo Eliminator, or Bonded Acoustical Cotton (B.A.C.), is the most cost-effective acoustical absorbing material on the market. It is a high-performance panel manufactured from recycled cotton, and is ideal for noise control applications. Echo Eliminator can be easily installed as acoustical wall panels or hanging baffles.

### FEATURES & BENEFITS

- No VOCs (Volatile Organic Compounds)
- No formaldehyde, does not require warning labels
- Fungi-, mold-, and mildew-resistant
- Class A Fire Rated (Non-flammable per ASTM E-84)

STOP NOISE

**ACOUSTICAL | SURFACES, INC.**

Celebrating Over 40 Years - SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION SPECIALISTS!

952.448.5300 | 800.448.0121 | sales@acousticalsurfaces.com | www.acousticalsurfaces.com

# Echo Eliminator Ceiling & Wall Panels

## APPLICATIONS

Residential, commercial, industrial; schools, restaurants, classrooms, houses of worship, community centers, offices, conference rooms, music rooms, recording studios, theaters, public spaces, medical facilities, auditoriums, arenas/stadiums, warehouses, manufacturing plants, and more.

## ACOUSTICS AND EXPECTED PERFORMANCE:

Absorbing sound and reducing echo / reverberation can be challenging. Echo Eliminator offers a high Noise Reduction Coefficient (NRC) to reduce the amount of sound within a room. One-inch thick panels are appropriate for areas where the main issue is understanding speech. Rooms with more mid-and low frequency noise, or where music is present, benefit from using two-inch thick panels.

## SIZES & OPTIONS

Standard Size: 24" x 48"; options: 12" x 12", 24" x 24", 48" x 48", 48" x 96", (minimum quantities apply, call for details).

**Note:** All sizes are nominal and subject to manufacturing tolerances that may vary +/- 1/8".

**Thickness/Density:** 1" thick/3 lb. per cubic foot (pcf); 1" thick/6 lb. pcf; 2" thick/3 lb. pcf.

## COLORS

Black, graphite, light grey, marble light blue, beige, white.

**Note:** Echo Eliminator panels are made from recycled fiber. Although we take extensive precautions and purge the production lines between colors, due to the recycled nature of the fibers, color inconsistencies between manufacturing runs are to be expected. Typical inconsistencies can be color, shade/tint, flecks, specks, surface compression, fiber/strand size, and other light surface inconsistencies. Please call for details.

## FLAMMABILITY

ASTM E84, Class A.


## INSTALLATION

Panels are most often installed directly onto the walls or ceilings with a spray/contact adhesive in combination with construction adhesive. The spray adhesive holds the panels in place while the construction adhesive is curing



**Superior Acoustic Properties:**  
Comparison between Echo Eliminator and Fiberglass

Product	Thickness	Density	MTG	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
Echo Eliminator	2"	3pcf	A	0.35	0.94	1.32	1.22	1.06	1.03	1.15
Fiberglass	2"	3pcf	A	0.17	0.86	1.14	1.07	1.02	0.98	1.00
Echo Eliminator	1"	6pcf	A	0.07	0.30	0.86	1.10	1.05	1.03	0.85
Fiberglass	1"	6pcf	A	0.02	0.27	0.63	0.85	0.93	0.95	0.65

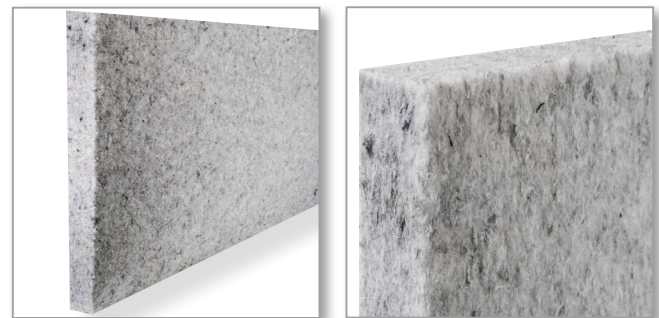

for a long-term hold. Panels can also be installed with hook and loop, various versions of double-sided tape, or have grommets installed and be hung on hooks as baffles.

## ECHO ELIMINATOR INSTALL VIDEO AVAILABLE ON YOUTUBE.

Please search "YouTube/Acoustical Surfaces" to see Echo Eliminator install videos, and other product installation videos.



Find us in

**MasterSpec**<sup>®</sup>

a product of The American Institute of Architects



**ACOUSTICAL | SURFACES, INC.**

© 2020 Acoustical Surfaces, Inc. V3

**Celebrating Over 40 Years - SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION SPECIALISTS!**

952.448.5300 | 800.448.0121 | sales@acousticalsurfaces.com | www.acousticalsurfaces.com