



Title: Sound Absorption Test Results

Product: 1" Poly Max

Application: Ceiling


Testing Standard: ASTM C423 E-400 Mount

Test Date: 10/24/2011

Why this test: This test evaluates a products efficiency of absorbing sound at multiple frequencies. The test simulates the product's acoustical performance with a ceiling installation.

Test Result Summary: NRC - 0.90; SAA - 0.88

NRC	SAA
0.90	0.88
Frequency (Hz)	Absorption Coefficient
100	0.36
125	0.44
160	0.54
200	0.63
250	0.80
315	0.81
400	0.77
500	0.73
630	0.85
800	0.96
1000	0.99
1250	1.02
1600	1.00
2000	1.05
2500	1.00
3150	0.97
4000	1.01
5000	1.04

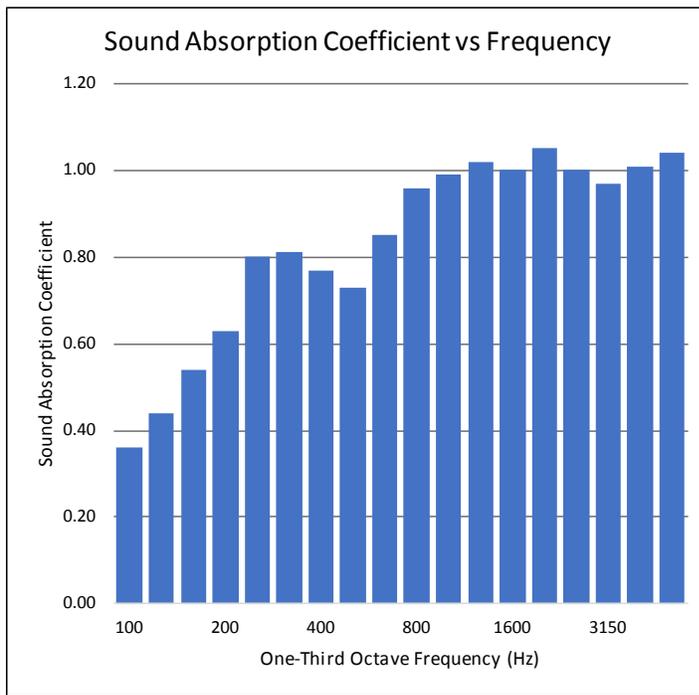

Test ID: TCT008105P-8

ASI TEST RESULT DISCLAIMER

ASI makes every effort to ensure the accuracy and reliability of the information provided. Laboratory testing is conducted by independent testing organizations. ASI does not guarantee that field tests or independent tests will not vary.

PROJECT NUMBER: TCT008105P-8
PAGE: 1 of 4
DATE: October 26, 2011

662 Cromwell Avenue Telephone : (651) 645-3601
 Saint Paul, MN 55114 Toll Free : (888) 645-TEST
 USA Telefax : (651) 659-7348
 Website : www.storksmt.com

Investigative Chemistry Geotechnical Construction Materials
 Non Destructive Testing Failure Analysis Product Evaluation
 Metallurgical Analysis Materials Testing Welder Qualification

**SOUND ABSORPTION TESTING CONDUCTED ON
 1" SYNTHETIC FIBERBOARD
 (E-400 Mount)**

**Prepared for:
 Acoustical Surfaces, Inc
 Attn: Mr. Mark Klein
 123 Columbia Court North, Suite 201
 Chaska, MN 55318**

Please contact Acoustical Surfaces, Inc. for information regarding this test
 1.800.854.2948

Prepared By:

Reviewed By:



**Mathew N. Botz
 Project Manager
 Product Testing Department
 (651) 659-7353**



**John Wegscheider
 Engineering Technician
 Product Testing Department**



The test results contained in this report pertain only to the samples submitted for testing and not necessarily to all similar products.

This document contains technical data whose export and re-export/re-transfer is subject to control by the U.S. Department of Commerce under the Export Administration Act and the Export Administration Regulations.

The Department of Commerce's prior written approval is required for the export re-export/re-transfer of such technical information to any foreign person, foreign entity or foreign organization whether in the United States or abroad. These commodities, technology or software were exported from the United States in accordance with Export Administration Regulations. Diversion contrary to U.S. Law prohibited.

Noise Reduction Coefficient (ASTM C423-09)

INTRODUCTION:

This report presents the results of sound absorption testing. The test units were submitted by Mr. Mark Klein. This work was completed on October 21, 2011.

This report must not be reproduced except in full with the approval of Stork Twin City Testing Corporation. The data in this report relates only to the items tested.

Stork Twin City Testing Corporation has been accredited by the U.S. Department of Commerce and the National Institute of Standards and Technology (NIST, formerly NBS) under their National Voluntary Laboratory Accreditation Program (NVLAP Lab Code 200046-0) for conducting ASTM C423 test procedures. This report may not be used to claim product endorsement by NVLAP, NIST or any agency of the U.S. Government.

TEST RESULTS SUMMARY:

<i>Noise Reduction Coefficient (NRC)</i>					Test Results		
Test #	Panel Identification	Mounting Type	Weight (lbs)	Weight (psf)	NRC	SAA	--
8-1	1" Synthetic Fiberboard	Type E400 = Box	44.9	0.6	<i>0.90</i>	<i>0.88</i>	--

See 'TEST DATA' section for detailed results.

PROJECT NUMBER: TCT008105P-8

PAGE: 3 of 4

DATE: October 24, 2011

SPECIMEN DESCRIPTION: (Also see "Test Results")

The specimens were identified by Acoustical Surfaces Inc. The specimens were identified as '1" Synthetic Fiberboard'. The panels measured 23-3/4" x 47-7/8" x 1" and weighed 5-lbs per panel.

TEST PROCEDURE**Sound Absorption Test**

ASTM C 423-09," Sound Absorption and Sound Absorption Coefficient by the Reverberation Room Method", was followed in every respect. The panels were tested in Type E-400 mount (with 16" airspace).

NRC was calculated by rounding the sound absorption coefficients for 250, 500, 1000 and 2000 Hz to the nearest 0.05. SAA was calculated by rounding the sound absorption coefficients for the twelve frequencies from 200 Hz to 2500 Hz to the nearest 0.01.

TEST EQUIPMENT:

<u>Manufacturer</u>	<u>Model Description</u>	<u>S/N</u>	
NI-ATS	Sound Measuring System	NI-92374-ATS	TCT102709.2
Norsonic	Rotating Microphone Boom	NOR265	
BSWA (Source Rm)	Pressure Condenser Microphone	MP253	450007
GRAS (Term Rm)	Pressure Condenser Microphone	40AD	19220-1244

REMARKS:

The test sample will be retained for a period of **10-days** and then discarded unless notified by the client.

F:\Product\MMFILES\MNB\2011 REPORTS MNB\8105-ASI-8.doc

TEST RESULTS:

SOUND ABSORPTION
ASTM C423

General Information


Project No:	ASI-8105-1
Customer:	Acoustical Surfaces Inc.
Test Date:	10-21-2011
Specimen ID:	Test 8
Specimen Description:	1" Synthetic Fiberboard Mounting Type E400 Box
Specimen Dimensions - Area:	108.00" W x 95.75" H - 71.81 ft ²
Operator:	JMW

Data Table

	absorption empty (m ²)	absorption * sample (m ²)	Absorption Coefficient
80	6.09	1.82	0.27
100	5.81	2.39	0.36
125	3.56	2.93	0.44
160	3.42	3.58	0.54
200	3.95	4.20	0.63
250	3.72	5.32	0.80
315	3.66	5.38	0.81
400	3.78	5.14	0.77
500	4.10	4.85	0.73
630	4.37	5.70	0.85
800	4.84	6.43	0.96
1000	5.03	6.59	0.99
1250	5.61	6.82	1.02
1600	6.37	6.68	1.00
2000	7.06	7.03	1.05
2500	8.03	6.69	1.00
3150	9.26	6.50	0.97
4000	11.42	6.72	1.01
5000	13.72	6.97	1.04

Room Conditions

Temperature	21.4 °C
R.H.	45 %
ATM	981 hPa

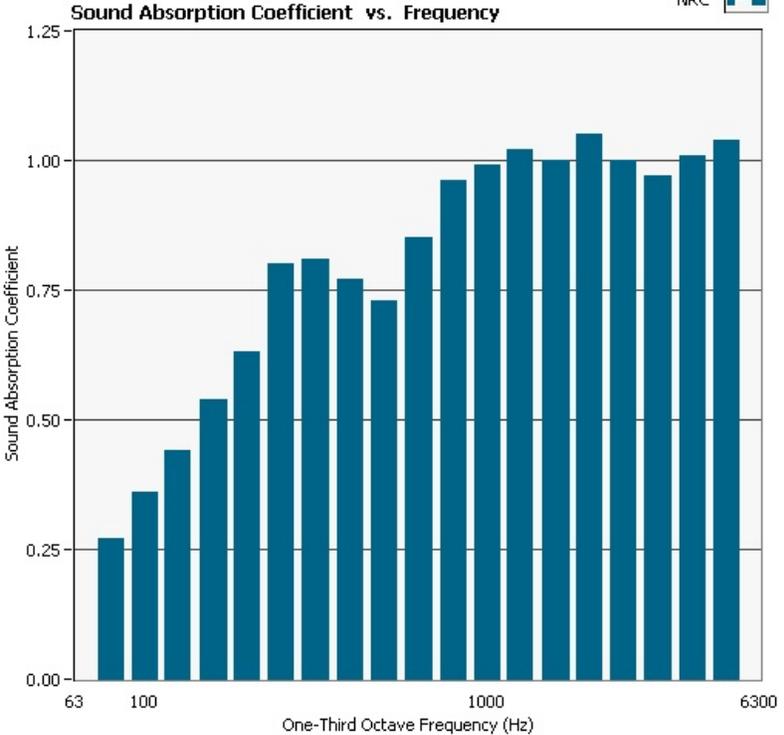

NRC
0.90

SAA
0.88

* based on an extended plane area of 71.81 ft²

Information and statements in this report are derived from material, information and/or specifications furnished by the client and exclude any expressed or implied warranties as to the fitness of the material tested or analyzed for any particular purpose or use. This report is the confidential property of our client and may not be used for advertising purposes. This report shall not be reproduced except in full, without written approval of this laboratory. The recording of false, fictitious or fraudulent statements or entries on this document may be punished as a felony under Federal Statutes including Federal Law Title 18, Chapter 47.