

SoundBreak XP  
**Wall® Board**



## Sound Control / Sound Dampening

*Dramatically reduce sound transmission between rooms*

- Superior sound damping, cost-efficient material that finishes easily and decorates in the same manner as standard gypsum board.
- Features the GridMarX® guidemarks on the board to allow for faster and more accurate installation.

Turn down the volume when you incorporate SoundBreak XP Wall® Board into your wall assemblies. You will dramatically reduce sound transmission between rooms or dwelling units with this superior sound-dampening gypsum board.


SoundBreak XP has an acoustically enhanced, high-density gypsum core encased in heavy, abrasion and mold/mildew/moisture resistant, 100% recycled PURPLE® paper on both sides. Plus, SoundBreak XP provides the same great mold-inhibiting qualities as XP Gypsum Board.

### Applications

- Use it for interior wall assemblies, where sound transmission between rooms or dwelling units is a concern.
- 5/8 in. (15.9 mm) SoundBreak XP Wall Board may be used where Type X Gypsum Board is specified in fire-rated assemblies.

### Advantages

- Provides high-rated Sound Transmission Class (STC) values per an independent third-party acoustical laboratory using ASTM E90 test procedures.
- Achieves high STC values in a thinner wall assembly, increasing usable floor space.
- Provides STC Ratings up to 56 for single-layer, steel stud partitions and up to 67 for area separation walls.
- For speed of installation and lower installation costs, vertical board joints do not require acoustical sealant.
- Resists the growth of mold per ASTM D3273 with a score of 10, the best possible score.
- Resists the growth of mold per ASTM G21 with a score of 0, the best possible score.
- Heavy abrasion-resistant paper and dense core provide greater resistance to surface abuse and indentation when tested in accordance with ASTM C1629.
- Installs like traditional gypsum board without requiring additional clips or channels.
- Cuts by scoring deeply from both sides before snapping or by using a hand or power saw.
- Fire-resistant material will not support combustion or transmit temperatures greatly in excess of 212 °F (100 °C) until completely calcined, a slow process.
- Dimensionally stable product with negligible expansion and contraction under normal atmospheric conditions.
- Achieves GREENGUARD and GREENGUARD Gold Certification. GREENGUARD Certified products are certified to GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information, visit: [ul.com/gg](http://ul.com/gg).
- Qualifies as a low-VOC emitting material by meeting California Specification 01350. For more information, visit: [calrecycle.ca.gov/greenbuilding/specs/section01350/](http://calrecycle.ca.gov/greenbuilding/specs/section01350/).
- Gold Bond® SoundBreak XP Wall® Board has achieved GREENGUARD Gold Certification.

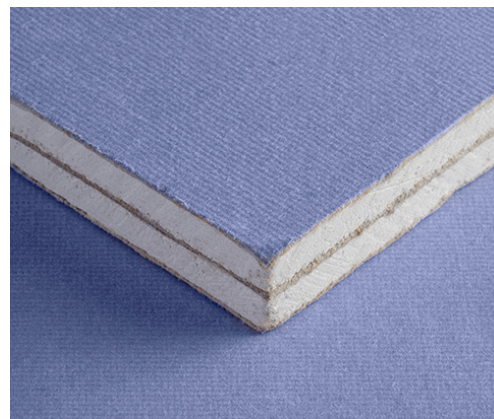

### Specifications

Products that suit any project criteria  
Product Details

Performance:	Acoustical, Drywall Panels
Edge(s):	Tapered
Thickness(es):	1/2", 5/8"
Width(s):	48"
Length(s)	8' to 12'



**ACOUSTICAL | SURFACES, INC.**

**Celebrating Over 40 Years - SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION SPECIALISTS!**  
952.448.5300 | 800.448.0121 | [sales@acousticalsurfaces.com](mailto:sales@acousticalsurfaces.com) | [www.acousticalsurfaces.com](http://www.acousticalsurfaces.com)

© 2020 Acoustical Surfaces, Inc. V1