

AIRE GUARDIAN® SHIELD COMPONENTS **CATALOG**

Temporary, reusable modular wall system for dust control
during construction and renovation in critical care environments





INTRODUCTION

The AIRE GUARDIAN® SHIELD is a modular wall system designed to contain airborne contaminants while performing construction or renovation work. The wall system can also be used as a patient isolation area or clean room to prevent airborne contaminants from entering. When used properly in conjunction with an Abatement Technologies Portable Air Scrubber, the AIRE GUARDIAN® SHIELD maintains negative or positive pressure differentials. Additionally, the AIRE GUARDIAN® SHIELD can be used to build an anteroom to allow passage between rooms while maintaining negative pressure differentials.


TABLE OF CONTENTS

Introduction	2
What is the AG SHIELD Ideal For?	3
The Real Advantage	4
Competitive Advantage	5
All About AG SHIELD Panels	6, 7
All About Exhaust Panels	8, 9
All About Door Panels	10
Special Order Clear Panels	11
Panel Accessories	12
Hardware and Connectors	13
AG SHIELD Parts List	14
Who We Are	15
Contact and Locations	16



Currently deployed in many major health networks
Exceeds ICRA Class 4 requirements
Premier temporary containment solution
Helps to reduce or eliminate future containment costs
System may pay for itself in as little as 3-5 uses

US: 1.800.634.9091 • ABATEMENT.COM



“We used the containment for an emergency job this morning and it has worked perfectly. We had a temporary poly containment fail due to water getting at the tape and your system has now gone up and it doesn't care about water at all.

-JASON S. *Facility Manager*

WHAT IS THE AG SHIELD IDEAL **FOR?**

Compared to the time required to cut and install drywall, the **AIRE GUARDIAN® Shield** is erected quickly and can adapt to multiple configuration requirements.

This innovation in containment is becoming the standard, as contractors are able to reduce labor and startup times through easy to connect panels, closed cell foam gaskets, and self-leveling floor sills.

Ideal for creating a temporary barrier around a construction or renovation area, the AIRE GUARDIAN® Shield can be re-used eliminating waste and future containment costs.



AG SHIELD **THE REAL ADVANTAGE**



QUICK, EASY AND VIRTUALLY DUST FREE

With a modular design and single tool assembly the SHIELD system will get you started with less labor, less time, and virtually no dust



ADAPTABLE DESIGN FOR EVERY JOB

With 4 panel sizes, fixed or flexible corners, doors that can swing in or out, and interchangeable exhaust collars, the SHIELD adapts to almost any work area



EXQUISITE DESIGN

Our extruded aluminum and frosted polycarbonate panels give any site a clean, professional, high-end image. The SHIELD is also customizable with your logo graphics



EASY DECONTAMINATION

With smooth surfaces that are resistant to aggressive hospital cleaning practices it is easy to decontaminate before, during, and after construction



ENVIRONMENTALLY SOUND, BUDGET FRIENDLY

Because the SHIELD system is reusable, you're not creating waste when it's time to move to the next job, compounding materials savings over time



SECURE ENVIRONMENT

With lockable doors and exhaust plates, as well as, virtually hidden panel connectors the SHIELD creates a protective barrier around your site



LEVEL SURFACE

Our unique leveling plates, shim system, and ceiling clamps help your containment stay sealed, even in uneven environments




ICRA COMPLIANCE

Easily create ICRA compliance up to Class 4

AG SHIELD

COMPETITIVE ADVANTAGE


HOW
WE
STACK UP
AGAINST
OTHER
PANEL
SYSTEMS



DESCRIPTION	AGSHIELD	OTHER COMPETITORS
NO TOOLS REQUIRED	✓	
INSTALLATION HARDWARE IS INCLUDED	✓	
DOOR CLOSER AND KEY LOCKING LEVER HANDLE INCLUDED	✓	
INTERCHANGEABLE EXHAUST COLLARS	✓	
PANELS AND DOORS AVAILABLE IN CLEAR MATERIAL	✓	
WINDOW KITS AVAILABLE	✓	
LIGHTWEIGHT	✓	✓
DURABLE	✓	✓
EXCEEDS ICRA CLASS IV REQUIREMENTS	✓	✓
MEETS CLASS A FIRE & SMOKE RATING	✓	✓
REDUCED ENVIRONMENTAL WASTE	✓	✓
HIGHLY ENGINEERED DESIGN	✓	✓
SOUND ATTENUATION	✓	✓



ALL ABOUT **AG SHIELD PANELS**

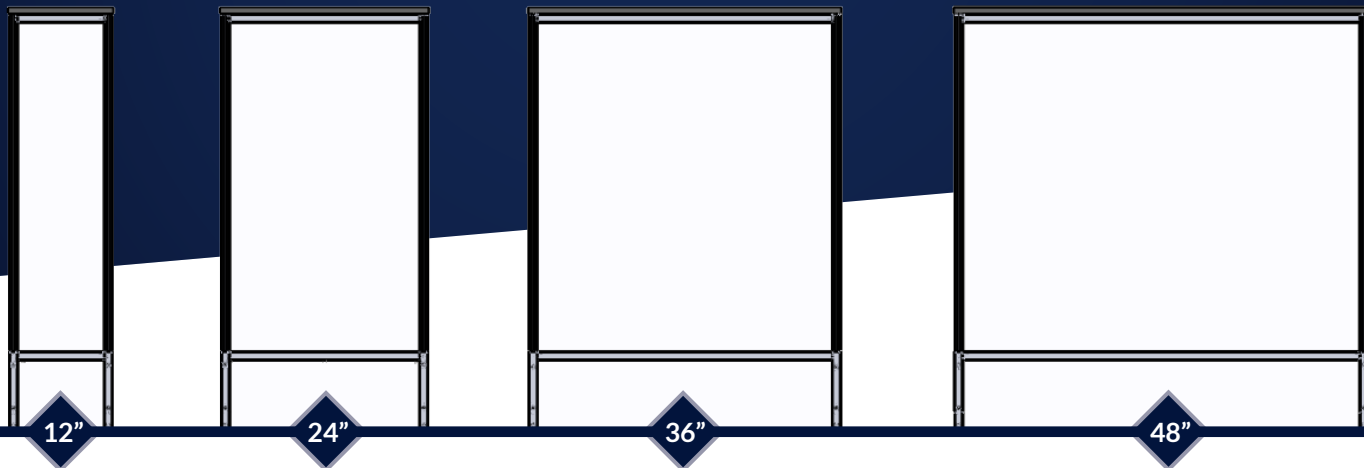

OTHER SPECS

Frame Construction:	Anodized Aluminum with steel screws
Weight Range:	17 - 32lbs
Panel Construction:	Translucent polycarbonate
Sound Attenuation:	In 3rd party test results, the AIRE GUARDIAN® SHIELD reduced the noise level of an air compressor operating at 90dB at a distance of 8ft from the wall by 17dB

POLYCARBONATE SURFACE BURN CHARACTERISTICS

ASTM E84 (US Standard)	NFPA Class A & IBC Class A
Flame Spread 5	Smoke Development Rating: 170




PANEL LISTINGS

STANDARD PANELS	WIDTH	MIN / MAX HEIGHT	DIMENSIONS	PART NUMBER
12" Panel	12"	84" / 123"	12"W x 84"T x 2"D	AGSHIELD-P12W
24" Panel	24"	84" / 123"	24"W x 84"T x 2"D	AGSHIELD-P24W
36" Panel	36"	84" / 123"	36"W x 84"T x 2"D	AGSHIELD-P36W
48" Panel	48"	84" / 123"	48"W x 84"T x 2"D	AGSHIELD-P48W

*All necessary installation hardware is included



ALL ABOUT **AG SHIELD PANELS**

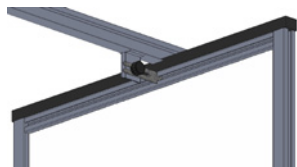

Ceiling Grid Attachment Hardware


Fits standard, recessed and concealed grid tiles



Thumbscrew for toolless panel height adjustment


Polycarbonate Panels

Smooth, durable, clean exterior surfaces



Secured Panelling

Panels are secured at the top and the bottom by inserting the 4-finger bracket into the frame channel.

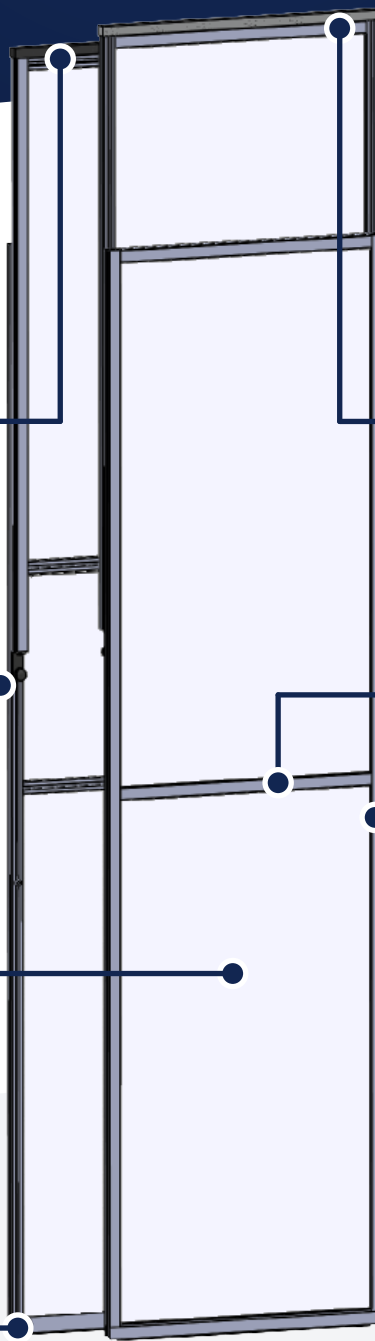

Multiple Widths

Available in 12", 24", 36", and 48" widths

Shims allow a solid connection between uneven panels

Self-leveling floor plates accommodate uneven environments, allow for sloping floors up to 1/8" per foot.



Top and Bottom Gaskets

3/8" Thick closed-cell soft foam gaskets create airtight seals

Lightweight

Weight ranges from 17 to 32lbs

Adjustable Height

Panels adjust from 7 ft to 10 ft 3 in

Extruded Aluminum Frame

4 connection points between upper and lower sections to prevent racking



Truss Brace

Truss Braces help to secure a longer length of panels by bracing them from mid-panel, then fastening the bracket to the floor.



AG SHIELD **EXHAUST PORT OPTIONS**

EXHAUST KIT with BLANK SECURITY PLATE | **AGSHIELD-EXK**

If ducting is needed on any other size of a panel, purchase an Exhaust Frame Kit. (AGSHIELD-EXK). This kit should be installed before assembling the AG SHIELD wall. If ducting is needed on both sides of a panel, purchase 2 of the Exhaust Frame Kits and mirror them on either side.



AGSHIELD-EX12

Exhaust port,
12" diameter collar



AGSHIELD-EX08

Exhaust port,
8" diameter collar



AGSHIELD-EX10

Exhaust port,
10" diameter collar



AGSHIELD-EXD

Exhaust/Intake plate with
diffuser & 2" pleated filter

AGSHIELD-EP24W

One exhaust port frame comes installed
on a two-foot white panel



When the port is not in use it can be sealed
with the removable locking security plate
which is included

MEASURING NEGATIVE **AIR**

Differential pressure monitor mounts fasten the Portable PPM3-S or Fixed Wall Mount RPM-RT series monitors to the outside or inside of panels to allow greater flexibility in monitor placement.

PPM3-S Pressure Monitor Mount



AGSHIELD-HWPM1

RPM-RT Pressure Monitor Mount



AGSHIELD-HWPM2



ALL ABOUT **EXHAUST PANELS**

“I can't tell you how much I love this system. I currently look after the construction projects in our hospital and have been utilizing our current system and have saved a significant amount of time and money doing so!

-CHAD M. *Project Coordinator*



Optional differential pressure monitor mounts fasten the PPM3-S or RPM-RT series monitors to the outside or inside of panels to allow greater flexibility in monitor placement.



Customizable, cut holes where needed using the Exhaust Kit Frame. Two Exhaust Ports (not included) can be installed into the same Kit Frame if ducting is required on both sides of the AIRE GUARDIAN® Shield modular Wall System.



ALL ABOUT AG SHIELD UNIVERSAL DOORS

AG SHIELD's prehung doors are available in two sizes, and are easily changed to swing in or out and hinge left or right. This door ships standard with a door closer, a lockable lever lockset and filler panels to adjust to different ceiling heights up to 10ft above the door. An optional Schlage® digital keypad with a lever style handle is available for purchase. (AGSHIELD-KEYPAD)

DETAILS

Standard class 3 hardware with
electronic keypad lock option
Class 2 SFIC lockset included
Easily change swing in/out
Over the door kit is included
Adjustable threshold and sweep
Closer is always mounted on the
construction side
Weight: 55 - 63lbs



AGSHIELD-D44W*

*Window Kit sold separately (AGSHIELD-WK)



PN: HARDWRE170
*Included



Optional purchase:
PN: AGSHIELD-KEYPAD



New Key Locking Lever Style
Handle included

UNIVERSAL DOOR LISTINGS

UNIVERSAL SWING

44" Hinged Door

Pre-hung Door includes Key Locking Lever Handle

AGSHIELD-D44W

32" Hinged Door

Pre-hung Door includes Key Locking Lever Handle

AGSHIELD-D32W

KEYPAD

Electronic Plymouth Elan Satin Chrome Keypad Lever Lock

AGSHIELD-KEYPAD

NEW AG SHIELD SLIDING DOOR

The self closing sliding door is an excellent option where space is limited. This option eliminates the need for a door to swing into a hallway or the containment space increasing safety. The door features a removable magnet to hold the door open and a gravity driven self closing mechanism.

This door slides to the left and requires a 3ft or 4ft panel installed to the left. It ships with a track cover, SCHLAGE® digital keypad handle and filler panels to adjust to different ceiling heights up to 10ft above the door.



SLIDING DOOR LISTING

SELF-CLOSING

44" x 80" Door

42" Sliding Door In a 48" White Panel

AGSHIELD-DS42W



SPECIAL ORDER **AIRE GUARDIAN® SHIELD CUSTOM COMPONENTS**

AG SHIELD CLEAR PANELS

Design the AG Shield wall system with your choice of clear, translucent, or a combination of both panels depending upon your requirements.




Where visibility is a must,
special order
clear panels
and doors

Minimum Order
Quantities Apply.

“Great product and accepted by many hospitals and institutions where infection control measures are the main focal point. Let's ensure all our staff and loved ones are protected during renovations.

JOE B. - Construction Superintendent

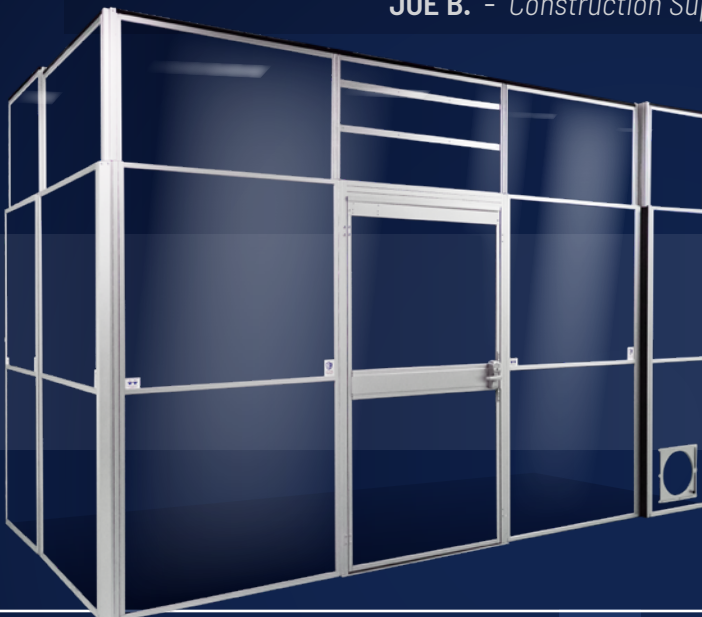

Talk to your Sales Representative
about your requirements for a
Custom Built Solution



AG SHIELD

PANEL ACCESSORIES

Windows

The window kit (AGSHIELD-WK) can be installed on a panel or door before or after the wall is built. It can be installed on any 2, 3 or 4-foot panel or door in the upper panel area. Simply cut out a rectangle that is 19" x 25" in the desired location. The kit includes the clear window pane, a frame, a template and all installation hardware.

Wall Seals

Wall seals can be used to create a small extension to fill gaps between an existing wall and the AIRE GUARDIAN® SHIELD wall. The Drywall adapter can be used to attach a section of drywall to the panel system to accommodate non-plumb walls or other protrusions such as handrails, pipes and large molding. Fixed Wall Seals abut against walls with obstructions 0.5" or less such as thin molding.

Corners

The flexible hinged universal corner has a maximum swing to 150° sweep outward and 105° sweep inward. When used as an inside corner it changes the path inwards towards the containment area and decreases the containment area. When used as an outside corner it changes the path outwards away from the containment area and increases the containment area. The fixed inside corner changes the wall path 90°.



Window Kit



Fixed Corners



Wall Seal - Drywall Adapter"



Universal Hinged Corners

ACCESSORY LISTINGS

PANEL CORNERS	MIN / MAX HEIGHT	WEIGHT (lbs)	PART NUMBER
Corner, Fixed 90° Inside	84" / 123"	14	AGSHIELD-CFI
Corner, Hinged Universal	84" / 123"	18	AGSHIELD-CHU
OTHER ACCESSORIES			PART NUMBER
Window Kit			AGSHIELD-WK
Wall Seal 3" Extended, Metal with Foam - L & R			AGSHIELD-WSE3
Wall Seal Kit, Extended - For Drywall			AGSHIELD-WSED
Wall Seal, Clear Polycarbonate			AGSHIELD-WSEL



AG SHIELD HARDWARE AND CONNECTORS

All necessary connectors are included with panels.
Additional connectors can be purchased using the part numbers listed below.

Panel Brackets (Upper and Lower)

Panel Brackets connect two panels together

Panel Clamps

Panel clamps close spaces between components which may arise due to sloped floors or corners. Panel clamps can be installed inside of the lower panels or outside of the upper panels.

Ceiling Brackets

Ceiling brackets attach the panels and doors to the suspended ceiling grid.

Shims

Use the appropriate number of shims to fill in gaps under the upper panel bracket

Transport Cart

The transport cart fits through standard doors and has four swivel wheels for easy handling. Panels are secured with ratchet straps. The large side of the cart can carry up to a total of 8 panels of any size but no more than 4 doors at a time. The small side can carry up to 3 one-foot or two-foot panels. Great for storage between projects. (The transport cart must be assembled)



AGSHIELD-CART2

ACCESSORY LISTINGS

HARDWARE AND CONNECTORS

PART NUMBER

Panel Brackets (10 Upper & 10 Lower Brackets with screws)

AGSHIELD-HWPB10

10 Panel Clamps

AGSHIELD-HWPC10

10 Ceiling Brackets

AGSHIELD-HWCG10

Shims, 30/PK

AGSHIELD-HWS30

Panel Brackets with Floor Mount

AGSHIELD-HWFB10

Drywall Ceiling Brackets

AGSHIELD-HWCD10

Transport Cart

AGSHIELD-CART2



AGSHIELD-HWCG10



AGSHIELD-HWPC10



AGSHIELD-HWFB10



AGSHIELD-HWCD10



AGSHIELD-HWS30

STANDARD PANELS	WIDTH	MIN / MAX HEIGHT	DIMENSIONS	PART NUMBER
12" Panel	12"	84" / 123"	12"W x 84"T x 2"D	AGSHIELD-P12W
24" Panel	24"	84" / 123"	24"W x 84"T x 2"D	AGSHIELD-P24W
36" Panel	36"	84" / 123"	36"W x 84"T x 2"D	AGSHIELD-P36W
48" Panel	48"	84" / 123"	48"W x 84"T x 2"D	AGSHIELD-P48W
24" Panel, White with Exhaust Port	24"	84" / 123"	24"W x 84"T x 2"D	AGSHIELD-EP24W

DOOR PANELS	TYPE	DETAILS	PART NUMBER
44" Hinged Door	Universal Swing	In a 48" panel, key locking lever handle set and door closer	AGSHIELD-D44W
32" Hinged Door	Universal Swing	In a 36" panel, key locking lever handle set and door closer	AGSHIELD-D32W
KEYPAD	-	Electronic plymouth Elan satin chrome keypad lever lock	AGSHIELD-KEYPAD
42" Sliding Door	Sliding	Self closing, 42" sliding door in a 48" white panel	AGSHIELD-DS42W

PANEL CORNERS	WEIGHT	DIMENSIONS	PART NUMBER
Corner, Fixed 90° Inside	14	123" / 84"	AGSHIELD-CFI
Corner, Hinged Universal	18	123" / 84"	AGSHIELD-CHU

EXHAUST SYSTEM INDIVIDUAL COMPONENTS	COLLAR SIZE	DIMENSIONS	PART NUMBER
Exhaust Kit, 2 Frames with Security Plate and Plastic Knob	-	16.5"W x 16.5"T x 2"D	AGSHIELD-EXK
8" Exhaust Plate	8"	15"W x 15"T x 3"D	AGSHIELD-EX08
10" Exhaust Plate	10"	15"W x 15"T x 3"D	AGSHIELD-EX10
12" Exhaust Plate	12"	15"W x 15"T x 3"D	AGSHIELD-EX12
Exhaust / Intake Plate with Diffuser and 2" Pleated Filter	-	20"W x 20"T x 3"D	AGSHIELD-EXD

PRESSURE MONITOR HANGER	MONITOR	PART NUMBER
Portable Pressure Monitor	PPM3-S	AGSHIELD-HWPM1
Wall Mounted Pressure Monitor	RPM-RT1 / RPM-RT2	AGSHIELD-HWPM2

HARDWARE AND CONNECTORS	PART NUMBER	OTHER ACCESSORIES	PART NUMBER
Panel Clamps, 10/PK	AGSHIELD-HWPC10	Window Kit	AGSHIELD-WK
Ceiling Brackets, 10/PK	AGSHIELD-HWCG10	Wall Seal 3" Extended, Metal with Foam - L & R	AGSHIELD-WSE3
Shims, 30/PK	AGSHIELD-HWS30	Wall Seal Kit, Extended - For Drywall	AGSHIELD-WSED
Panel Brackets with Floor Mount	AGSHIELD-HWFB10	Wall Seal Clear Polycarbonate	AGSHIELD-WSEL
Drywall Ceiling Brackets	AGSHIELD-HWCD10	Transport Cart	AGSHIELD-CART2
Panel Brackets, Upper and Lower, 10/PK	AGSHIELD-HWPB10	Closed Cell Gasket, 8ft length	TAPE46



WHO WE **ARE**

Infection control and reducing healthcare associated infections (HAI's) have become a central concern in hospital construction environments. Our passion is clean air and we have been designing and manufacturing equipment for healthcare facilities for over 30 years. Our vast portfolio of Abatement Branded products includes; negative air machines, air scrubbers, patient isolation systems, pressure differential monitors, and mobile containment carts to name just a few. The development of the AIRE GUARDIAN® Shield was a natural extension of our desire to help control dust and the potential release of airborne pathogens into the air in critical care environments, posing a risk to patients, staff and visitors.

We are dedicated to providing the best in customer service and technical support for all of our products. Let us help you with all of your construction containment needs.



*Products shown are not to scale. Visit the website for more details.

Part Numbers: 1) PPM3-S [Left] and RPM-RT1 [Right] 2) BD2KM/A 3) HC800FD/UV 4) HC500CD 5) RAM3000DBL 6) AT250RS 7) RAM1000 8) RAM1000LP 9) PRED750 10) AG8000 11) PAS750 12) AGSHIELD-CART2

For more than 30 years
companies around
the world have
relied on Abatement
Technologies for HEPA
filtration systems
and other indoor
air quality products
with industry-leading
quality, performance
and reliability.

Our experienced and professional staff are
dedicated to providing exceptional customer
service and technical support.

Knowledgeable sales representatives can help
you select the right equipment for your
specific application.



MAIN OFFICES

Abatement Technologies US
605 Satellite Blvd. Suite 300
Suwanee, GA 30024
US 800-634-9091
Intl. +01-678-889-4200
iaqinfo@abatement.com

Abatement Technologies CA
7 High Street
Fort Erie, ON L2A 3P6
CAN. 800-827-6443
Intl. +01-905-871-4720
iaqinfo@abatement.ca

SATELLITE OFFICES

Vancouver
F102-19720-94A Avenue,
Langley, BC V1M 3B7
778-372-2611

Hamilton
428 Millen Rd. Unit 10
Stoney Creek, ON L8E 3N9
905-664-6075

St. John's
5 Maverick Place
Paradise, NL A1L 1Y8
709-800-9020

Ottawa
51 Capital Drive
Ottawa, ON K2G 0E7
613-749-9667

Dartmouth
121 Ilsley Ave Unit 12
Dartmouth, NS B3B 1J1
902-334-0900

Edmonton
16403 - 117 Ave. NW
Edmonton, AB T5M 3V3
780-665-5165

Toronto
144 Sharer Rd.
Vaughan, ON L4L 8P4
905-266-1322

Montreal
1950 Bernard Lefebvre
Laval, QC H7C 0A5
514-375-0606

Calgary
F-7004 5th St. SE
Calgary, AB T2H 2G3
403-351-2223

