




FROM  
**PURCLEAN™**  
SPOT-FREE RINSE SYSTEMS

## PURCLEAN™ SPOT FREE RINSE SYSTEM

### E<sup>3</sup> Series 12,000GPD Spot Free Rinse System

#### Features:

- Water Stabilizer - Replaces Water Softener
- Lower Reject & Flush Water Use for More Efficiency
- Inlet & Pressure Pump
- Easy Installation - Installation Kit Included
- Clear Control Box Lid - Quick and Easy PLC Diagnostics
- Carbon Tank with Auto Back Flushing Head
- Multi-Stage Pressure Pump
- Low Incoming Water Pressure Shut Off
- Automatic Membrane Flush
- Production & Reject Meters
- On Board Dual TDS Meter
- Stainless Cabinet Stand
- Thin Film Membrane
- ETL Listed
- Repressurization and / or Reject Recapture Delivery Pump

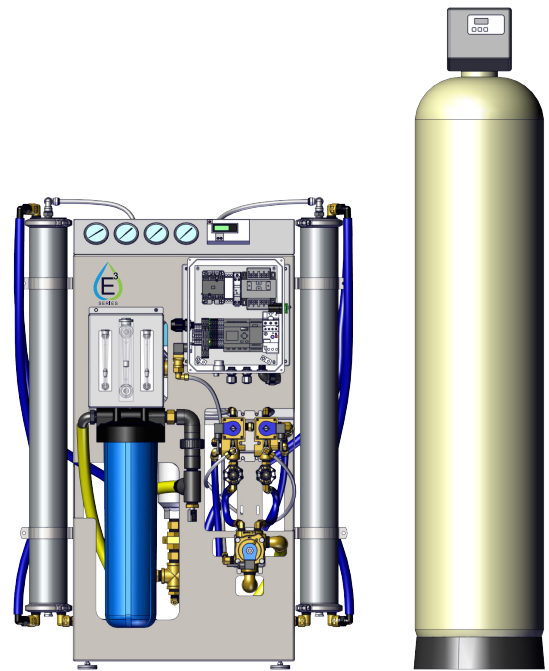

#### Specifications

<b>Water Requirements</b>	(1) 1" Water line w/FPT ball valves, 30GPM at 40PSI. Mount 4 feet up from floor to the right of the spot free rinse system and (1) drain.			
<b>Electrical Requirements</b>	1Ph	(1) 220V 20 Amp single phase circuit with a cord and a L6-20 locking receptacle or a flexible watertight conduit. Electrical box should be 5 feet away from the floor on the right side of the equipment.		
	3Ph	(1) 208/230V or 460/480V 20 Amp circuit with a flexible watertight conduit. Electrical box should be 5 feet from the floor on the right side of the equipment.		
<b>RO Output</b>	Production - 8.33 GPM			
<b>Reject</b>	3.6 GPM			
<b>RO Motor</b>	3HP 60 Hz 3450 RPM Open Drip Proof			
<b>RO Motor Amps</b>	1Ph 208/230 = 14.9 amps	3Ph 208/230 = 10.8 amps	3Ph 460/480 = 4.9 amps	Contact PurClean for other power options
<b>Dimensions</b>	36.5"W x 26.5"D x 50.6" H			
<b>Gross Weight</b>	700 lbs. (machine weight with carbon tank)			
<b>Delivery Pump</b>	Standard delivery pump 15 GPM max at 50 PSI max. Automatic freshwater bypass. Pressure and GPM varies depending on which car wash application. <i>(Contact PurClean for more information.)</i>			