




FROM  
**PURCLEAN™**  
 SPOT-FREE RINSE SYSTEMS

## PURCLEAN™ SPOT FREE RINSE SYSTEM

### E<sup>3</sup> Series 15,000GPD Spot Free Rinse System

#### Features:

- Water Stabilizer - Replaces Water Softener
- Lower Reject & Flush Water Use for More Efficiency
- Inlet & Pressure Pump
- Easy Installation - Installation Kit Included
- Clear Control Box Lid - Quick and Easy PLC Diagnostics
- Carbon Tank with Auto Back Flushing Head
- Multi-Stage Pressure Pump
- Low Incoming Water Pressure Shut Off
- Automatic Membrane Flush
- Production & Reject Meters
- On Board Dual TDS Meter
- Stainless Cabinet Stand
- Thin Film Membrane
- ETL Listed
- Repressurization and / or Reject Recapture Delivery Pump

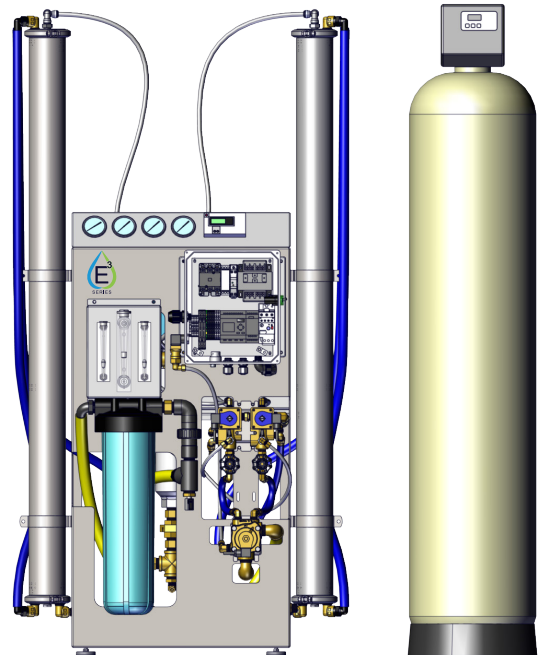

#### Specifications

|                                |   |  |  |
|--------------------------------|---|--|--|
| <b>Water Requirements</b>      | (1) 1.5" Water line w/FPT ball valves, 40GPM at 40PSI. Mount 4 feet up from floor to the right of the spot free rinse system and (1) drain.   |  |  |
| <b>Electrical Requirements</b> | 3Ph   | (1) 208/230V or 460/480V 20 Amp circuit with a flexible watertight conduit. Electrical box should be 5 feet from the floor on the right side of the equipment. |  |
| <b>RO Output</b>               | Production - 10.4 GPM   |  |  |
| <b>Reject</b>                  | 4.5 GPM   |  |  |
| <b>RO Motor</b>                | 3HP 60 Hz 3450 RPM Open Drip Proof  |  |  |
| <b>RO Motor Amps</b>           | 3Ph 208/230 = 9.8 amps  | 3Ph 460/480 = 4.9 amps   | Contact PurClean for other power options |
| <b>Dimensions</b>              | 36.5"W x 26.5"D x 72" H   |  |  |
| <b>Gross Weight</b>            | 700 lbs. (machine weight with carbon tank)  |  |  |
| <b>Delivery Pump</b>           | Standard delivery pump 15 GPM max at 50 PSI max. Automatic freshwater bypass . Pressure and GPM varies depending on which car wash application. <i>(Contact PurClean for more information.)</i> |  |  |