




FROM  
**PURCLEAN™**  
 SPOT-FREE RINSE SYSTEMS

## PURCLEAN™ SPOT FREE RINSE SYSTEM

### E<sup>3</sup> Series 25,000GPD Spot Free Rinse System

#### Features:

- Water Stabilizer - Replaces Water Softener
- Lower Reject & Flush Water Use for More Efficiency
- Inlet & Pressure Pump
- Easy Installation - Installation Kit Included
- Touch Screen Control Panel for Easy Operation and Diagnostics
- Carbon Tank with Auto Back Flushing Head
- Multi-Stage Pressure Pumps
- Low Incoming Water Pressure Shut Off
- Automatic Membrane Flush
- Production & Reject Meters
- On Board Dual TDS Meters
- Stainless Cabinet Stand
- Thin Film Membranes
- ETL Listed
- Repressurization and / or Reject Recapture Delivery Pump
- Dual Stage System with 2 Pumps for Increased Efficiency on Variable Demands

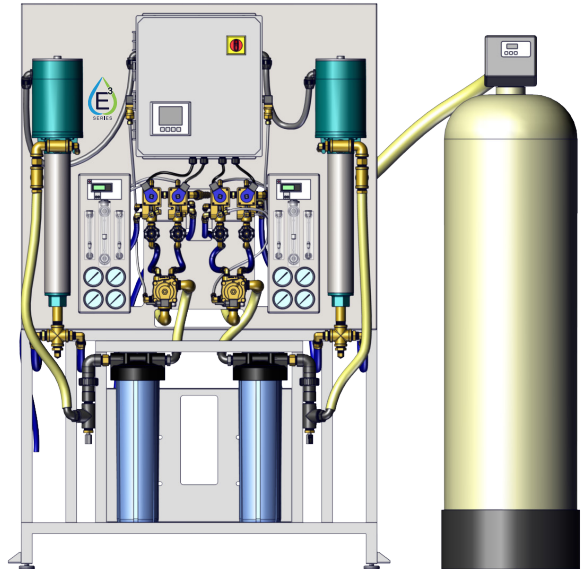

#### Specifications

<b>Water Requirements</b>	(1) 2" Water line w/FPT ball valves, 70GPM at 40PSI. Mount 4 feet up from floor to the right of the spot free rinse system and (1) drain.		
<b>Electrical Requirements</b>	3Ph / Control Power (1)110/120V control circuit 10amps	(1) 208/230V 30 Amp circuit or 460/480V 20 Amp circuit with a flexible watertight conduit. Electrical box should be 5 feet from the floor on the right side of the equipment.	
<b>RO Output</b>	Production - 17 GPM		
<b>Reject</b>	11.6 GPM		
<b>RO Motor</b>	3HP 60 Hz 3450 RPM Open Drip Proof		
<b>RO Motor Amps</b>	3Ph 208/230 = 9.8 amps x (2) pumps	3Ph 460/480 = 4.9 amps x (2) pumps	Contact PurClean for other power options
<b>Dimensions</b>	54"W x 37"D x 77" H		
<b>Gross Weight</b>	875 lbs. (machine weight)		
<b>Delivery Pump</b>	Standard delivery pump 15 GPM max at 50 PSI max. Automatic freshwater bypass. Pressure and GPM varies depending on which car wash application. <i>(Contact PurClean for more information.)</i>		