




FROM
PURCLEAN™
 SPOT-FREE RINSE SYSTEMS

PURCLEAN™ SPOT FREE RINSE SYSTEM

E³ Series 30,000GPD Spot Free Rinse System

Features:

- Water Stabilizer - Replaces Water Softener
- Lower Reject & Flush Water Use for More Efficiency
- Inlet & Pressure Pump
- Easy Installation - Installation Kit Included
- Touch Screen Control Panel for Easy Operation and Diagnostics
- Carbon Tank with Auto Back Flushing Head
- Multi-Stage Pressure Pumps
- Low Incoming Water Pressure Shut Off
- Automatic Membrane Flush
- Production & Reject Meters
- On Board Dual TDS Meters
- Stainless Cabinet Stand
- Thin Film Membranes
- ETL Listed
- Repressurization and / or Reject Recapture Delivery Pump
- Dual Stage System with 2 Pumps for Increased Efficiency on Variable Demands

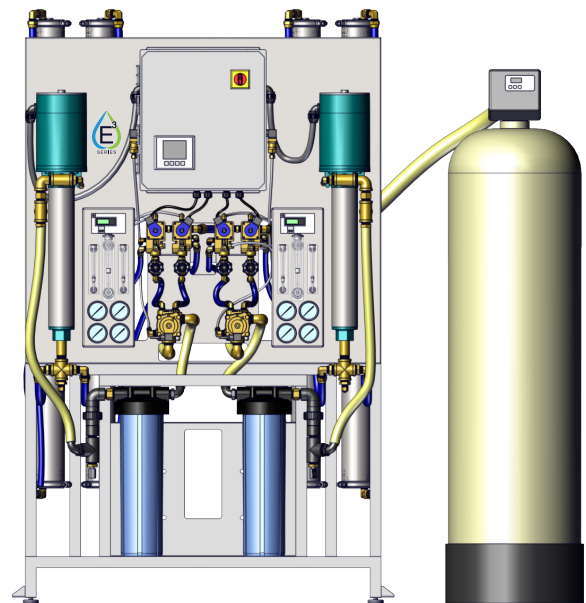

Specifications

Water Requirements	(1) 2" Water line w/FPT ball valves, 70GPM at 40PSI. Mount 4 feet up from floor to the right of the spot free rinse system and (1) drain.		
Electrical Requirements	3Ph / Control Power (1)110/120V control circuit 10amps	(1) 208/230V 30 Amp circuit or 460/480V 20 Amp circuit with a flexible watertight conduit. Electrical box should be 5 feet from the floor on the right side of the equipment.	
RO Output	Production - 20.8 GPM		
Reject	13.9 GPM		
RO Motor	3HP 60 Hz 3450 RPM Open Drip Proof		
RO Motor Amps	3Ph 208/230 = 9.8 amps x (2) pumps	3Ph 460/480 = 4.9 amps x (2) pumps	Contact PurClean for other power options
Dimensions	54"W x 37"D x 77" H		
Gross Weight	875 lbs. (machine weight)		
Delivery Pump	Standard delivery pump 15 GPM max at 50 PSI max. Automatic freshwater bypass. Pressure and GPM varies depending on which car wash application. <i>(Contact PurClean for more information.)</i>		