




FROM
PURCLEAN™
 SPOT-FREE RINSE SYSTEMS

PURCLEAN™ SPOT FREE RINSE SYSTEM

E³ Series 4,000GPD Spot Free Rinse System

Features:

- Water Stabilizer - Replaces Water Softener
- Lower Reject & Flush Water Use for More Efficiency
- Inlet & Pressure Pump
- Easy Installation - Installation Kit Included
- Clear Control Box Lid - Quick and Easy PLC Diagnostics
- Carbon Tank with Auto Back Flushing Head
- Multi-Stage Pressure Pump
- Low Incoming Water Pressure Shut Off
- Automatic Membrane Flush
- Production & Reject Meter
- On Board Dual TDS Meters
- Thin Film Membrane
- ETL Listed
- Repressurization and / or Reject Recapture Delivery Pump

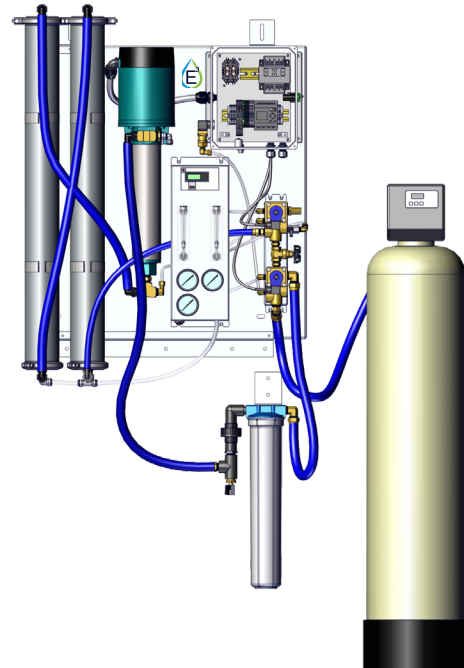

Specifications

Water Requirements	(1) 1" Water line w/FPT ball valves, 20GPM at 30PSI. Mount 4 feet up from floor to the right of the spot free rinse system and (1) drain.			
Electrical Requirements	1Ph	(1) 220V 20 Amp single phase circuit with a cord and a L6-20 locking receptacle or a flexible watertight conduit. Electrical box should be 5 feet away from the floor on the right side of the equipment.		
	3Ph	(1) 208/230V or 460/480V 20 Amp circuit with a flexible watertight conduit. Electrical box should be 5 feet from the floor on the right side of the equipment.		
RO Output	Production - 2.8 GPM			
Reject	1.2 GPM			
RO Motor	1HP 60 Hz 3450 RPM Open Drip Proof			
RO Motor Amps	1Ph 208/230 = 9 amps	3Ph 208/230 = 4.5 amps	3Ph 460/480 = 2.25 amps	Contact PurClean for other power options
Dimensions	36.5"W x 18"D x 54" H			
Gross Weight	350 lbs. (machine weight with carbon tank)			
Delivery Pump	Standard delivery pump 15 GPM max at 50 PSI max. Automatic freshwater bypass. Pressure and GPM varies depending on which car wash application. <i>(Contact PurClean for more information.)</i>			