


Double Bolt Clamp

Used on smooth exterior debris hoses.

Part No.	Description
42592	4" (101 mm)
1280049	6" (152 mm)
20856	8" (203 mm)
1280051	10" (254 mm)
1280052	14" (355 mm)

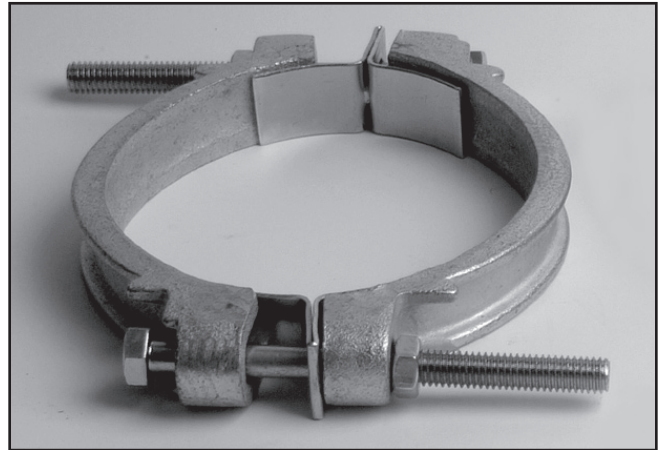

Coupler Clamp

For coupling male and female hose connections.

Part No.	Description
42586	4" (101 mm)
42587	6" (152 mm)
42588	8" (203 mm)
43563	10" (254 mm)
43371	12" (305 mm)



T-Bolt Clamp

Used on smooth exterior debris hoses.

Part No.	Description
45727	3-1/2" (88.9 mm)
45728	4" (101 mm)
45729	4-1/2" (114.3 mm)
45730	6-1/2" (165.1 mm)
46634	8-1/2" (215.9 mm)
70406	10" (254 mm)
1320557	13-3/4" (349.3 mm) used on microstrainer-to-blower and blower-to-silencer expansion joints
1320833	8" (203 mm) worm gear for float ball



Power Clamp

Used on corrugated exterior hose, such as Kanaflex or Plastic (PVC) hoses.

Part No.	Description
43389	4" (101 mm)
43415	6" (152 mm)
43388	8" (203 mm)
45739	10" (254 mm)
45606	12" (305 mm)



Quick Clamp

Used for coupling flanged ends.

Part No.	Description
46471A	4" (101 mm)
46471	5" (127 mm)
32087	6" (152 mm) - (8-5/8" I.D.)
16584	8" (203 mm) - (11-1/2" I.D.)
20543	10" (254 mm) - (12-5/8" I.D.)
20542	14" (355 mm) - (17-3/16" I.D.)



Expansion Plug

Part No.	Description
45731	2" Plug
45355	6" Plug (use seal PN 45591)
45035	8" Plug (use seal PN45592)
45590	10" Plug
45036	12" Plug (use seal PN45593)
71801	6" hyd. tank

Cage Long

Hose is placed inside of cage, most commonly used with plastic or PVC flex material (wears out hose instead of nozzles). The cage nozzle has an end guard to prevent hose from collapsing.

Related Items: See Page F-1 for Guzzler Grip tools.

Part No.	Description
1280843	4" (101 mm) Aluminum
1280841	4" (101 mm) Steel
1280847	6" (152 mm) Aluminum
1280845	6" (152 mm) Steel
1280851	8" (203 mm) Aluminum
1280849	8" (203 mm) Steel

Cage Short

Hose is placed inside of cage, most commonly used with plastic or PVC flex material (wears out hose instead of nozzles). The cage nozzle has an end guard to prevent hose from collapsing.

Part No.	Description
1280842	4" (101 mm) Aluminum
1280840	4" (101 mm) Steel
1280846	6" (152 mm) Aluminum
1280844	6" (152 mm) Steel
1280850	8" (203 mm) Aluminum
1280848	8" (203 mm) Steel