


# THERMISER MAX<sup>®</sup> DOOR

Model ESD30



Thermiser Max doors pay for themselves based on model and climatic zone.<sup>1</sup>

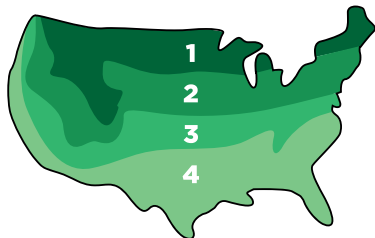

Zone	Annual Savings	Payback Years
1	\$972	2.0
2	\$775	2.6
3	\$593	3.3
4	\$488	4.1

Thermiser Max compared to a Standard Service Door

## TODAY'S MOST ENERGY EFFICIENT ROLLING DOOR

### PERFORMANCE...TESTED AND PROVEN

Built to order, Thermiser Max is best used in exterior openings where maintaining environmental separation on each side of the door is necessary. Doors meet ASHRAE<sup>®</sup> 90.12, 2015 IECC<sup>®</sup> and California's Title 24 air infiltration requirements with an independently tested value of less than 0.3 CFM/FT<sup>2</sup>. It can also be configured to meet a maximum. Operational wind load of 20PSF.

### PATENTED SEALING SYSTEM

This exclusive full perimeter seal, combined with thermally broken guide construction and insulated curtains, minimizes air infiltration and thermal transference.

### A GREEN, ENERGY EFFICIENT OPTION


This door delivers a 94% decrease in air infiltration compared to standard products<sup>3</sup> and can contribute up to 38 credits in five LEED categories. A comprehensive LEED<sup>®</sup> package is available on our website.

### REDUCES SOUND TRANSMISSION

Sound Transmission Class (STC) rating is up to 30 for the curtain and up to 22 for the entire assembly. If an STC of 32 is desired, additional options are required. Please consult the factory for details. All configurations are evaluated per ASTM E90, based on testing a complete, operable assembly.

# INSULATED ROLLING DOOR **THERMISER MAX® DOOR** Model ESD30

## STANDARD COMPONENT MATERIALS AND FINISHES

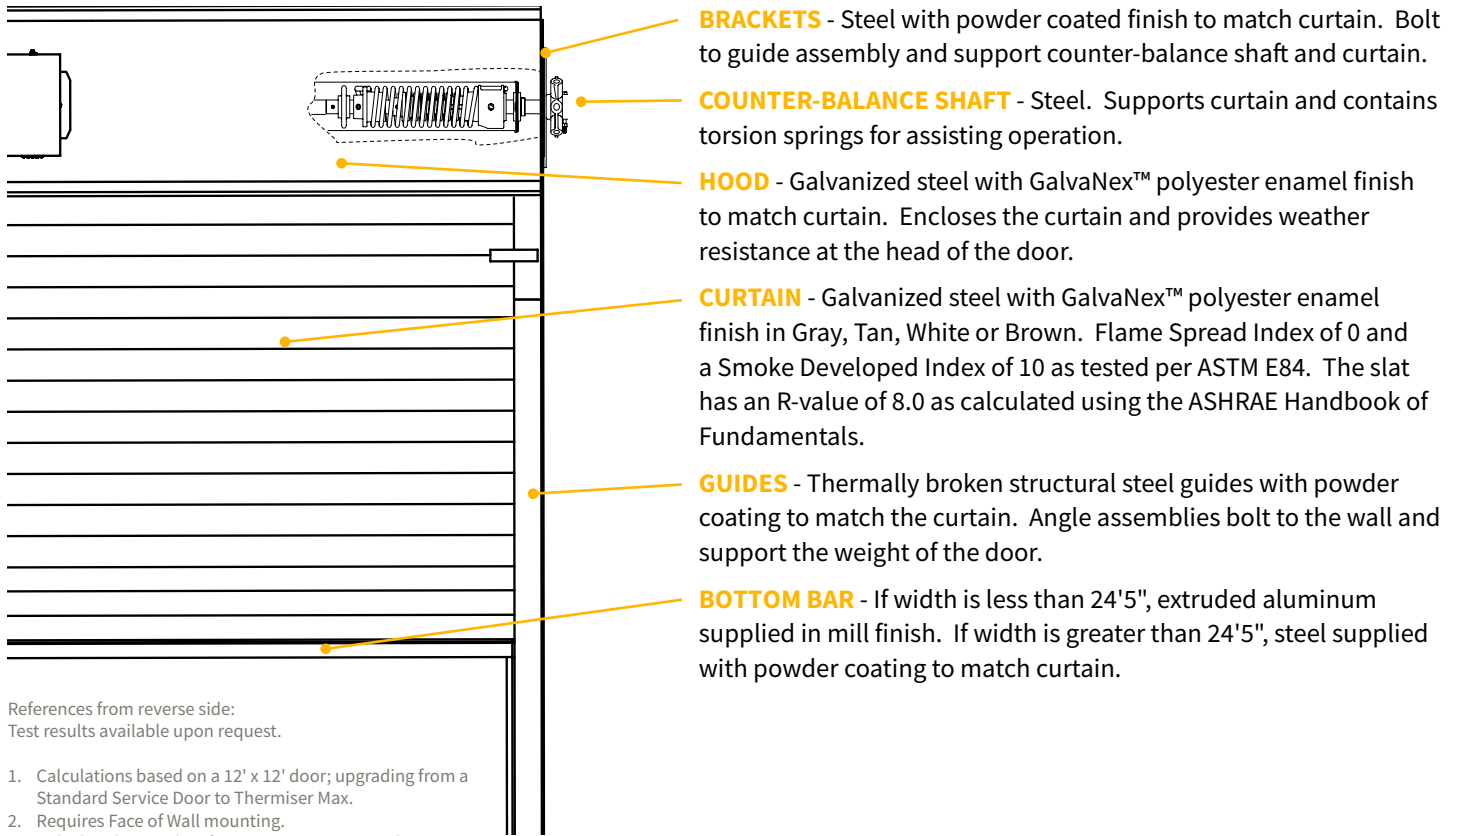

**BRACKETS** - Steel with powder coated finish to match curtain. Bolt to guide assembly and support counter-balance shaft and curtain.

**COUNTER-BALANCE SHAFT** - Steel. Supports curtain and contains torsion springs for assisting operation.

**HOOD** - Galvanized steel with GalvaNex™ polyester enamel finish to match curtain. Encloses the curtain and provides weather resistance at the head of the door.

**CURTAIN** - Galvanized steel with GalvaNex™ polyester enamel finish in Gray, Tan, White or Brown. Flame Spread Index of 0 and a Smoke Developed Index of 10 as tested per ASTM E84. The slat has an R-value of 8.0 as calculated using the ASHRAE Handbook of Fundamentals.

**GUIDES** - Thermally broken structural steel guides with powder coating to match the curtain. Angle assemblies bolt to the wall and support the weight of the door.

**BOTTOM BAR** - If width is less than 24'5", extruded aluminum supplied in mill finish. If width is greater than 24'5", steel supplied with powder coating to match curtain.

References from reverse side:  
Test results available upon request.

1. Calculations based on a 12' x 12' door; upgrading from a Standard Service Door to Thermiser Max.
2. Requires Face of Wall mounting.
3. Calculated using data from an ASHRAE research report for standard coiling doors.

## OPERATION AND STRUCTURAL REQUIREMENTS

**Hand chain, hand crank and a variety of motor options are available.**

This product is supported by a guide assembly attached to the jamb construction. No additional header support is required unless hood supports are mandated by a larger opening width.

## OPTIONAL MATERIALS AND FINISHES

- ▶ Aluminum in mill, clear and color anodized
- ▶ Stainless steel - 300 series in #4 finish
- ▶ SpectraShield® Powder Coating in more than 180 colors

### Brackets, Guides and Bottom Bar

- ▶ Hot-dip galvanizing on steel components
- ▶ Zinc-enriched, corrosion-resistant powder coating in Gray



## CUSTOM-DESIGNED SOLUTIONS

Contact our experienced Architectural Design Support Team for help in customizing our products to fit your specific application. Call 800.233.8366 ext. 4551 • [architecturaldesignsupport@cornellcookson.com](mailto:architecturaldesignsupport@cornellcookson.com)