



Installation Instructions

JK Rear Grab Handles

Product Number: JK1051

Application: 07-15 JK WRANGLER

SAFETY

Your safety and the safety of others is very important.

- In order to help you make informed decisions about safety, we have provided installation instructions and other information.
- These instructions alert you to potential hazards that could hurt you or others.
- Please do a job safety analysis (JSA) before each task to identify potential hazards for your situation and remove/protect against them.
- You must use your own good judgment, and take your time.

Read and understand all safety precautions and instructions before installing this product.

**THIS PRODUCT IS FOR OFFROAD USE ONLY. ALL LIABILITY FOR
INSTALLATION AND USE RESTS WITH THE OWNER.**

**CARELESS INSTALLATION AND OPERATION CAN RESULT IN SERIOUS INJURY
OR EQUIPMENT DAMAGE.**

**SENSORS FIELD OF VIEW WILL BE ALTERED WITH USE OF THE
REPLACEMENT BUMPER.**

Injury hazard

Failure to observe these instructions could lead to severe injury or death.

- Always** remove jewelry and wear eye protection.
- Always** use extreme caution when jacking up a vehicle for work. Set emergency brake and use tire blocks. Locate and use the vehicle manufacturers designated lifting points. Use jack stands.
- Always** use appropriate and adequate care in lifting components into place.
- Always** insure components will remain secure during installation and operation.
- Always** wear safety glasses when installing this kit. A drilling operation will cause flying metal chips. Flying chips can cause serious eye injury.
- Always** use extreme caution when drilling on a vehicle. Thoroughly inspect the area to be drilled (on both sides of material) prior to drilling, and relocate any objects that may be damaged.
- Always** use extreme caution when cutting and trimming during fitting.
- Always** tighten all nuts and bolts securely per installation instructions.
- Always** route electrical cables carefully. Avoid moving parts, components that become hot and rough or sharp edges.
- Always** insulate and protect all exposed wiring and electrical terminals.
- Always** perform regular inspections and maintenance on mounts and related hardware.



Installation Instructions

JK Rear Grab Handles

Product Number: JK1051

Application: 07-15 JK WRANGLER

I. Overview

Congratulations on your purchase of the industries' best and most stylish JK Rear Grab Handles!

Your Grab Handles were designed in 3-D, fabricated, and powder coated... all in the U.S.A.

Enjoy the fit and finish of the quality Rear Grab Handles from Fab Fours Inc!





Installation Instructions


JK Rear Grab Handles

Product Number: JK1051


Application: 07-15 JK WRANGLER

Vehicle Preparation

1. Start by removing the two OEM bolts holding the sound bar to the roll cage. See image below.

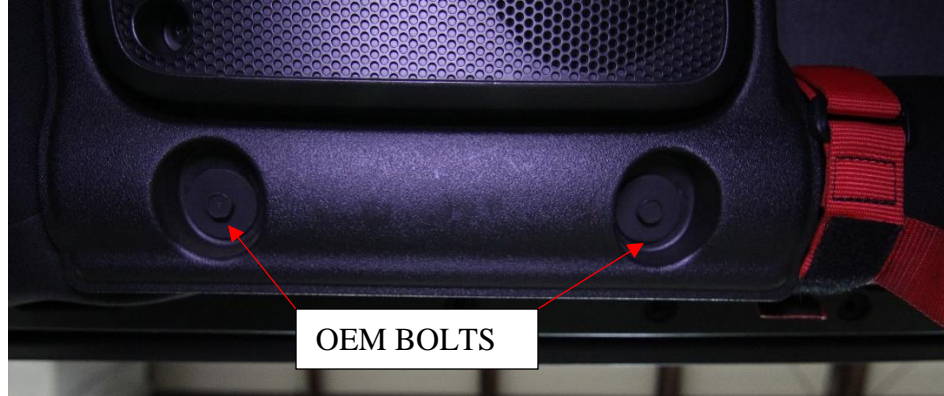

2. Next install the logo plate using supplied hardware. Placing spacers on back side of grab handle. See image below.

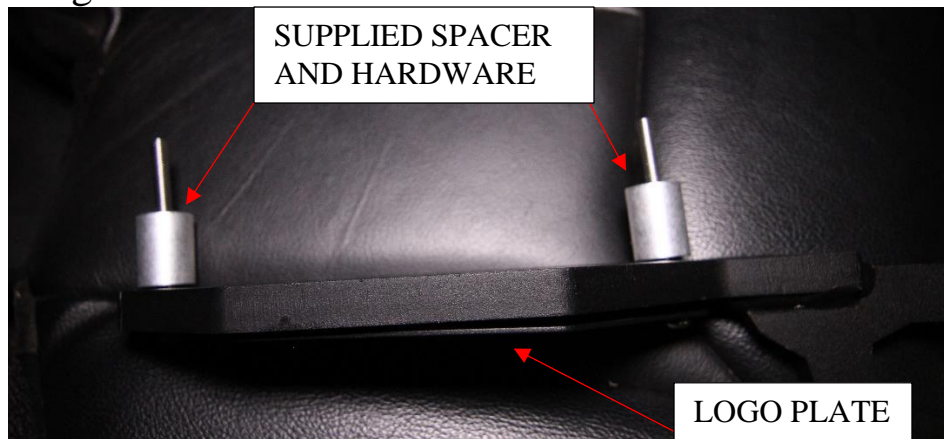



Installation Instructions

JK Rear Grab Handles

Product Number: JK1051

Application: 07-15 JK WRANGLER

3. Next holding the spacers in place so they do not fall off bolt. Install bolt into the removed OEM bolt location. Do not tighten. See image below.



4. Next position grab handle to desired location and fully tighten all hardware.
5. Repeat steps 1-4 on passenger side.



Installation Instructions

JK Rear Grab Handles

Product Number: JK1051

Application: 07-15 JK WRANGLER

II. Maintenance/Care

- Periodically check and tighten all fasteners.
- Stripped, fractured, or bent bolts or nuts need to be replaced.
- Keep all surfaces free of dirt, road grime, and standing water to ensure finish longevity.

III. Contact Information

Fab Fours Inc.
2213 Industrial Park Rd.
Lancaster, SC 29720

Phone (866)-385-1905
Fax (866)-574-1424
Email Support@fabfours.com



More than expected... Better than expected