


APPLICATION CONDITIONS	MIN.	NOM.	MAX.
TEMPERATURE (°F)			
PRESSURE (PSI)			
SPEED (SFPS)			
STROKE LENGTH (IN)			
CYCLE RATE (CYL/SEC)			
MEDIA			

BILL OF MATERIALS				
ITEM	QTY	PART#	MATERIAL	DESCRIPTION

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	ECN #
2	A	ADDED BLANK NUMBER AND DIMENSIONS	5/24/2018	8524
3	B	UPDATED FOR BETTER SPRING RETENTION	4/26/2021	1426

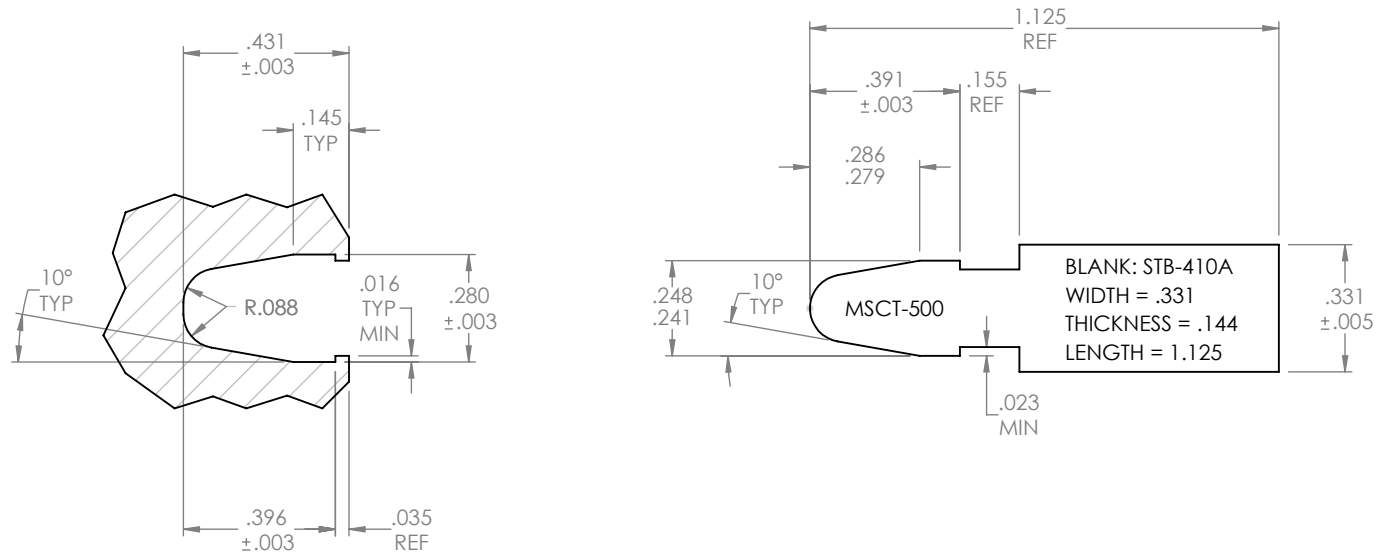

500V GROOVE



**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MW INDUSTRIES, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MW INDUSTRIES, INC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 FRACTIONAL ± 1/16"  
 ANGULAR: ± .5°  
 TWO PLACE DECIMAL ±.01  
 THREE PLACE DECIMAL ±.005

JACKET MATERIAL:  
 SPRING TYPE: 500 V-SPRING  
 O-RING:  
 DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	L. DOUGLAS	10/12/17
MFG REVIEW		
ENG APPR.		10/12/17

COMMENTS:



TITLE:  
**GENERAL ARRANGEMENT  
 500 V-SPRING  
 GROOVE AND TOOL**

SIZE	DWG. NO.	REV
<b>A</b>	<b>MSCT-500</b>	<b>B</b>
SCALE: NTS		SHEET 1 OF 1