#### **SPECIFICATIONS (GI-SS-750)**

1. 4" inlet/outlet (No-Hub)

COMPANY:

DATE OF APPROVAL:

- Liquid capacity: 750 U.S. Gallons 2,840 litres 2.
- 3. Grease Retention Capacity at Flow Rate of 100 GPM: 3,492 lbs. (485 Gallons)
- Grease Retention Capacity at Flow Rate of 250 GPM: 1,916 lbs. (266 Gallons) 4.
- 5. Unit weight with standard covers: 1,105 lbs.
- Made from rotationally molded High Density Polypropylene (HDPE) 6.

SIGNATURE OF APPROVAL:


7. Made in USA / Limited Lifetime Warranty / Both indoor and outdoor use



CERTIFIED MANAGEMENT SYSTEM - ISO 9001:2015



## **TOWN & COUNTRY PLASTICS**

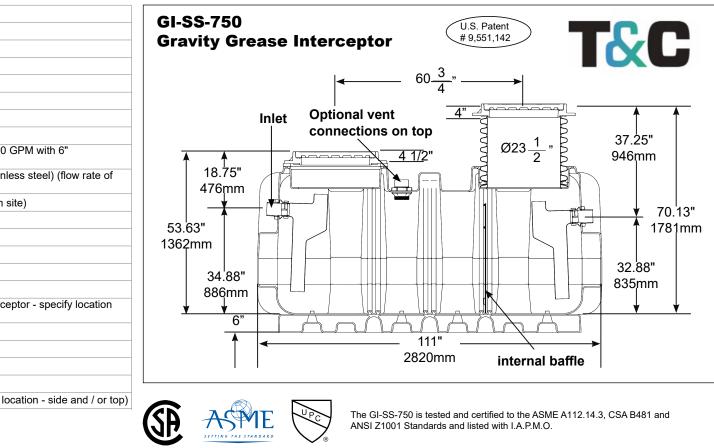

#### SERIES PART NUMBER: SS (GREASE)

**DESCRIPTION: T&C SS Series high density** polyethylene (H.D.P.E.) grease interceptor.

Other sizes: 500, 1000, 1250, 1300, 1500, 2000 (liquid holding capacity - gallons) Not tested to PDI standards.

### **TOWN & COUNTRY PLASTICS Customized For Precision**

Town and Country Plastics. LLC. 10-B Timber Lane, Marlboro, NJ 07746 1-732-780-5300 • Fax 1-732-294-0001

www.tandcplastics.com · sales@tandcplastics.com

Suffix	Optional Variations
-AK	Anchor kit (set of two)
-C	Lid extension (specify dimension required)
-COA	Coalescer Pack
-DI	Ductile iron lid & collar
-DP	Dosing pump
-EP	Enzyme port
-FL-C	Membrane clamp kit
-F6	6" No Hub Inlet / Outlet connection (flow rate of 700 GPM with 6" connections)
-F8	8" No Hub Inlet / Outlet connection (fabricated stainless steel) (flow rate of 1,200 GPM with 8" connections)
-HLA	High level alarm and float switch (to be installed on site)
-LHSI	4" no hub inlet on left hand side
-LHSO	4" no hub outlet on left hand side
-POK	Remote pump out kit
-RHSI	4" no hub inlet on right hand side
-RHSO	4" no hub outlet on right hand side
-RPO	4" Remote pump outlet connections on top of interceptor - specify location and number required
-SB	Sediment bucket
-SP	External Sampling port - inline, high connections
-SP-L	External Sampling port - inline, low connections
-SP-OF	External Sampling port - offset
-V	Vent connection - 4" (specify number required and location - side and / or top)

# SUBMITTAL SHEET