Discover Swivel Stool

Discover D-Series swivel stools feature a pneumatic lift for easy height adjustment and are available with shell sizes of A+ and A. Also available with optional seat pad (DL9A-1, DL9X-1).

Shell

Shell is one-piece, injection-molded polypropylene with anti-static additive. Color is dispersed across the polypropylene for an even appearance. Enhanced waterfall front edge and biometric design allows comfortable seating. Contoured shell geometry allows rear facing seating position. Fifteen integrated wrap around ribs are provided for shell strength. Both sides of shell are textured and constructed with a handle in the upper portion of the the shell with smooth edges for ease when carrying. Shell is permanently attached to the frame with six non-load bearing steel rivets.

Frame

A pneumatic adjustable column assembly is attached to the base and seat support. Seat supports are two 1¹/₈" 16-gauge tubes with end closures welded to two 16-gauge die formed seat brackets punched for concealed rivets. The one-piece shell is supported at the intersection of the seat and back with a 3/16" die formed mounting plate, welded to the seat assembly and riveted to the lower flanges of the shell to prevent excessive flexing of the back. Adjustable 18" diameter foot ring located on the column assembly provides 10" adjustment range from 8"-18" from the floor.

Base

5-star base is made of glass filled nylon and receives the adjustable column assembly and casters.

Casters

Stool has five nylon hard twin-wheel free-rolling casters. Also available with softwheel casters or nylon bell glides.


Compliance

- > Complies with Consumer Products Safety Improvement Act (CPSIA) of 2008
- > Indoor Advantage[™] Gold. Indoor air quality certified to SCS-EC10.3-2014
- > Tested to applicable ANSI/BIFMA Furniture Standards





Discover Seating Swivel Stool

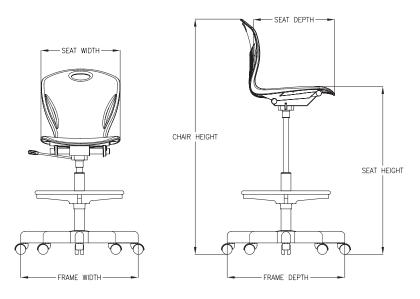

BASE MODEL	HEIGHT - SEAT "	WIDTH - SEAT "	DEPTH - SEAT "	HEIGHT - CHAIR "	WIDTH - FRAME "	DEPTH - FRAME "
DL9A	23.4" - 33.4"	16.0"	16.0"	38.0" - 48.0"	24.2"	24.2"
DL9A-1	23.4" - 33.4"	16.0"	16.0"	38.0" - 48.0"	24.2"	24.2"
DL9X	23.25" - 33.25"	17.0"	17.5"	38.25" - 48.25"	24.2"	24.2"
DL9X-1	23.25" - 33.25"	17.0"	17.5"	38.25" - 48.25"	24.2"	24.2"